

FLEXLED
DC545
 MEDIUM LED FLOOD



5 YEAR STANDARD WARRANTY | RATED LIFE: 85,000 HOURS+



HOUSING:

Die Cast Aluminum with Bronze Powder Coat and Heat and Impact Resistant Glass

MOUNTING:

Integral 1/2" male threaded end.
 Optional Post Top Fitter available.

DRIVER:

Constant Current Class 2 100-277 VAC 50/60Hz
 Power Factor: >0.98

CERTIFICATIONS:

Conforms to UL Standards UL-8750 and UL-1598. ETL Listed for USA and Canada. Certified to CSA22.2

ENVIRONMENT:

Outdoor/Wet Location
 IP65 Rated

ARRA COMPLIANT:

Buy American Compliant under Section 1605 of the American Re-Investment and Recovery Act..

ORDERING GUIDE


STANDARD CONFIGURATION: DC545.28W.40K

MODEL	WATTS	COLOR TEMPERATURE (CCT)	ACCESSORIES
DC545	14W	30K 3000K - Warm White	DIM Accessory - 0-10V Dimmable Driver
	28W	40K 4000K - Neutral White	R300755 Accessory - 120V Photocell
	42W	50K 5000K - Cool White	R300756 Accessory - 208V/277V Photocell
		55K 5500K - Daylight	R303604 Accessory - Post Top Fitter

SPECIFICATIONS

SYSTEM WATTS	DELIVERED LUMENS	EFFICACY	CRI	~HID
14W	1,358lm	97 lm/W	>85	100W
28W	2,716lm	97 lm/W	>85	175W
42W	4,074lm	97 lm/W	>85	250W

DIMENSIONS

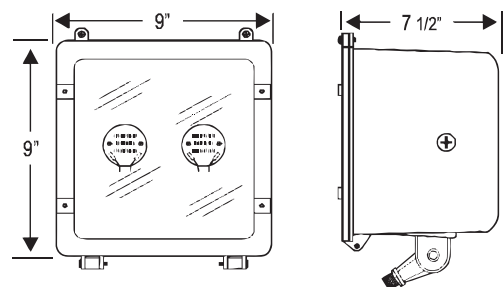

Specifications subject to change without notice.