



Lightline® Recessed Wall Wash T5 / T5HO

Type:

Project:

SPECIFICATIONS

2 1/4" Aperture

LWR9


CATALOG NUMBER

FT


Examples: LWR9 G 1 54T5HO HOL U4 120 GEB10 L/LP C200 — LWR9 G 1 14T5 HOL U2 277 GEB10 LP835 C201

AVAILABLE FIXTURES


□ LWR9 - 1 2'




2'



□ LWR9 - 1 4'



4'



SPECIFICATIONS

Construction

Housing is formed from painted cold-rolled steel. Five-stage iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Painted parts finished with high-gloss baked enamel.

Reflectors

Specular asymmetric reflector system. Black metal diffuser with round holes.

Electrical

Specify 120 volt, 277 volt, or 347 volt. Non EL versions damp location labeled. C-UL listed and labeled. For special circuiting, consult factory.

Fixture Size

Nominal 2" aperture. 2' and 4' lengths available.

ORDERING LOGIC

FT								▶▶▶	
Fixture	Ceiling Type	# of Lamps in Cross Section	Lamp Type	Shielding	Length	Voltage	Ballast Type		
LWR9	G Lay in grid	1	24T5HO 24W 2' T5HO 54T5HO 54W 4' T5HO 14T5 14W 2' T5 28T5 28W 4' T5	HOL Black Metal Diffuser with Round Holes	U2 2' U4 4'	120 277 347	GEB10 <10% THD ELECTRONIC Dimming Ballasts Available ADEZ ^{1,2} Advance Mark 10 dimming ECO10 ¹ Lutron ECO-10 dimming DMHL ^{1,2} Lutron Hi-Lume ADZT ^{1,2} Mark 7 (0-10 volt) OSDIM ^{1,2} Osram 0-10v dimming Reference Ballast Chart on website or consult factory for other options.		
▶▶									
Emergency		Lamp Color	Finish	Options					
Blank EL ³ Emergency Battery Pack	L/LP No Lamp LP830 3000k 80+ CRI LP835 3500k 80+ CRI LP841 4100k 80+ CRI Reference Lamp Chart on website or consult factory for other options.	C200 Standard White (low gloss) C201 Black (default)	GLR Fast Blow Fuse GMF Slow Blow Fuse CP Chicago Plenum FLNG Flange Kit (dry wall only)						
Notes: 1 Not available in 347 volt. 2 Only available with 54T5HO. 3 Only available with 28T5 & 54T5HO.									

Lightline® Recessed Wall Wash T5 / T5HO

PHOTOMETRICS

2 1/4" Aperture

LWR9


Type:

Project:

1-LAMP 54W T5HO

1-LAMP 28W T5HO

FAR-FIELD PHOTOMETRY
REPORT NUMBER: 0893 DATE: 12-12-2005
CATALOG NUMBER: LWR9-1-54T5HO
LUMINAIRE: 3 1/2" W X 3 3/4" H RECESSED WALL WASH WITH ASYMMETRIC-THROW
SPECULAR REFLECTOR AND PERF. BLACK TRIM
LAMP(S): FP54/835/HO RATED @ 5000 LUMENS
BALLAST: QTP-1X54HO/UNV PSN
MOUNTING:
LUMEN TO CANDELA RATIO USED = 9.15
TOTAL INPUT WATTS = 60.9 AT 120.0 VOLTS
THE 0 DEGREE PLANE IS PERPENDICULAR TO THE LAMPS.

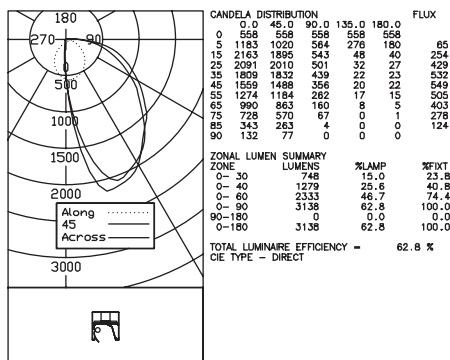


APPROVED BY:



BARE LAMP LUMEN VALUE IS RATED AT LAMP OPERATING TEMPERATURE INSIDE THE LUMINAIRE.
FOR DETAIL EXPLANATIONS, PLEASE SEE PEERLESS PUBLICATION # A62

FAR-FIELD PHOTOMETRY
REPORT NUMBER: 6932 DATE: 1-19-2006
CATALOG NUMBER: LWR9-1-24T5HO
LUMINAIRE: 3 1/2" W X 3 3/4" H RECESSED WALL WASH WITH ASYMMETRIC-THROW
SPECULAR REFLECTOR AND PERF. BLACK TRIM
LAMP(S): FP24/835/HO RATED @ 2200 LUMENS
BALLAST: QTP2X38-24T5HO/UNV PSN
MOUNTING:
LUMEN TO CANDELA RATIO USED = 9.15
TOTAL INPUT WATTS = 26.8 AT 120.0 VOLTS
THE 0 DEGREE PLANE IS PERPENDICULAR TO THE LAMPS.

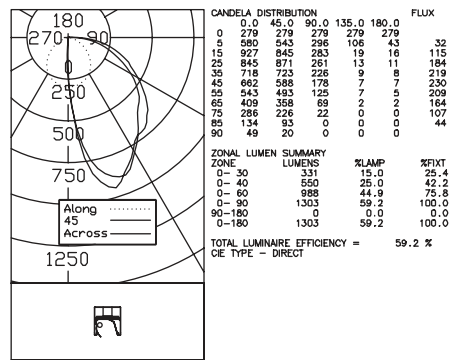

APPROVED BY:



BARE LAMP LUMEN VALUE IS RATED AT LAMP OPERATING TEMPERATURE INSIDE THE LUMINAIRE.
FOR DETAIL EXPLANATIONS, PLEASE SEE PEERLESS PUBLICATION # A62