



Reflector Flood

50ER30 120/130V 24/1

Philips Family of Specialty Incandescents provide the perfect light for dramatic accents and display lighting as well as general lighting in a variety of applications. These flood lamps produce homogeneous beams of high intensity for general illumination.

Product data

• General Information

Cap-Base	Medium [Medium]
Operating Position	Universal [Universal]
Main Application	Indoor Reflector
Gas Filling	GAS
Life With 3 Hour Per Day Use	0.9 a
Footnote Incandescent 1	Do not allow hot bulb to come in contact with liquid or metal parts of the fixture, as glass may shatter. Do not use outdoors. Do not operate in close proximity to flammable materials or those adversely affected by heat or drying. Operate only in heat resistant sockets. (87)

• Light Technical

Initial lumen (Nom)	570 lm
Beam Description	Flood [Flood]
Luminous Flux Lamp @ 120V	430 lm
Correlated Color Temperature (Nom)	2790 K

• Operating and Electrical

Power (Rated) (Nom)	50 W
---------------------	------

Lamp Wattage Rated@120V	52 W
Voltage (Nom)	120 V

• Mechanical and Housing

Bulb Finish	Frosted (FR)
Cap-Base Information	Aluminium [Aluminium Cap]
Filament Shape	CC6 [Straight]

• Approval and Application

Estimated Energy Cost Per Year At 120V	6.26 \$
Estimated Energy Cost Per Year	7.11 \$

• Product Data

Order product name	50ER30 120/130V 24/1
EAN/UPC - Product	046677143558
Order code	143552
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24
Material Nr. (12NC)	923250035502
Net Weight (Piece)	0.001 kg


PHILIPS

Dimensional drawing

50W E26 120V ER30 FR

Product

50ER30 120/130V 24/1

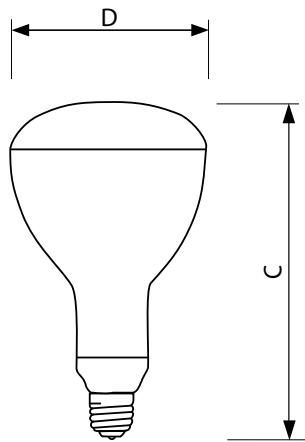

E26, ER30



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, November 29
data subject to change