

PAR38 LED

32PAR38/LED/830/S15/DIM SO-B 120V 6/1



Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

• General Information

Cap-Base	E26 [Single Contact Medium Screw]
Bulb Shape	PAR38 [PAR 4.75 inch/121mm]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	32-250W

Lamp Current (Nom)	280 mA
Wattage Equivalent	250 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V

• Light Technical

Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	15 °
Initial lumen (Nom)	2800 lm
Luminous Flux (Rated) (Nom)	2800 lm
Luminous Intensity (Nom)	30000 cd
Color Designation	White (WH)
Rated Beam Angle	15 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	88 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

• Temperature

T-Case Maximum (Nom)	95 °C
----------------------	-------

• Controls and Dimming

Dimmable	No
----------	----

• Approval and Application

Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	Not applicable

• Product Data

Order product name	120V PAR38 32W 15D 3000K SO B
Order code	465112
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001266904
Net Weight (Piece)	0.535 kg

• Operating and Electrical

Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	32 W


PHILIPS

PAR38 LED

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.



Dimensional drawing

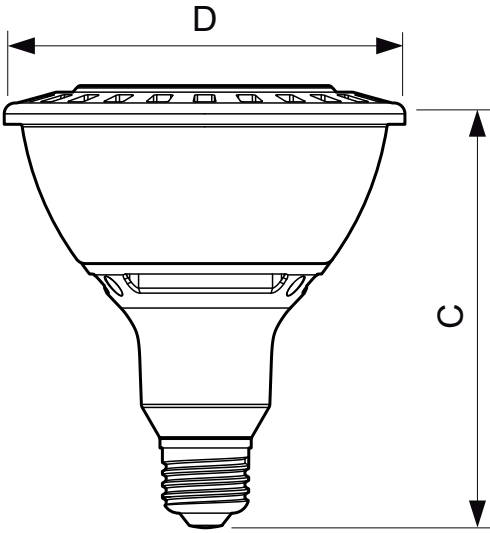

- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005

PAR38 CDMR 120V 32W-70W 3000K E26 ND

Product	D	C
120V PAR38 32W 15D 3000K SO B		

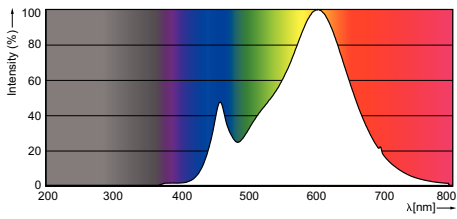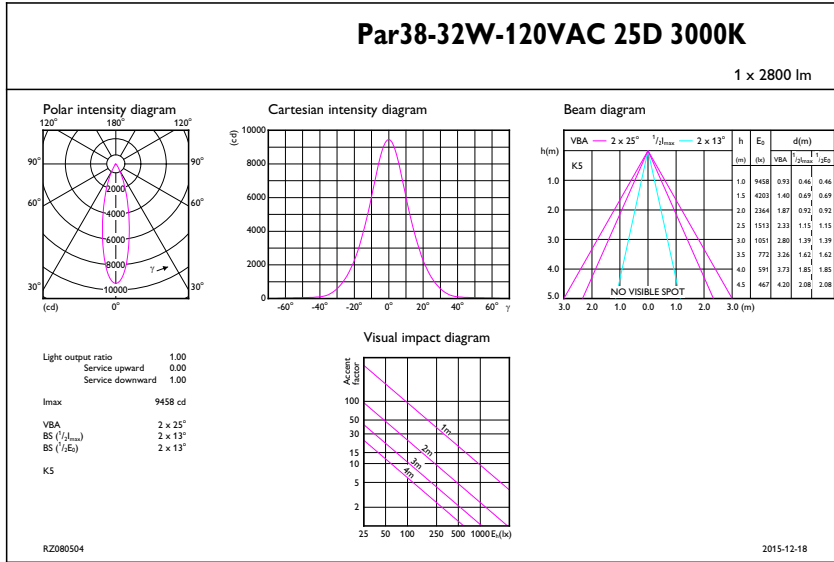

© 2016 Philips Lighting Holding B.V.
 All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, October 11
 data subject to change