



AJH125PSQ/PC



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Type II distribution Area Light with pole top fixed arm mount for use on 10' - 15' poles. Fixed mounting @ 90° to pole. Drilling 2" on center. Factory wired for 277V. Lamp supplied.

SPECIFICATIONS

Construction:

Die cast aluminum housing and door. Tether connects door to housing for safety.

Effective Projected Area:

EPA = 0.8. With House Side Shield = 1.5

Finish:

Weather resistant polyester powder coat, Architectural Bronze or White finish with stainless steel hardware.

Reflector:

High quality hydroformed semi-specular aluminum.

UL Listing:

Suitable for wet locations.

Patents:

The design of the AJ Area Light is protected by U.S. Patents D579,140, D579,141, D591,445, Canada patents D127,031, D127,040, D127,045, China patents ZL200830143714.3, ZL200830143713.9, ZL200830143712.4, Mexico patents 27395, 28572, 28577 and Taiwan patents D129,808 and D131,622.

Socket:

HID: Porcelain 4KV Pulse rated Medium base. Corrosion resistant screw shell with spring loaded center contact.


Color:

Bronze

Weight:

18.38

DIMENSIONS

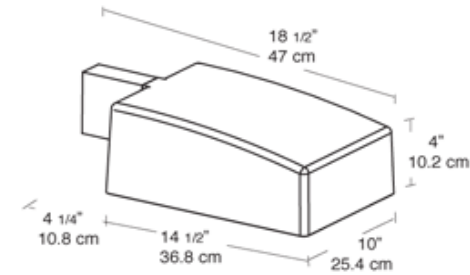

ORDERING INFORMATION

Metal Halide Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
	125	ED17/ HBU	Med	CWA-HPF QT	.9/1.3	.5/.8	.5/.7	.4/.6	150	M150	12000	15000

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2011 RAB Lighting, Inc.