

RAB LIGHTING FXH50XQT



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Medium Base HPS, MH or CFL specification grade flood with Integra Hood glare shield and fixed wall mounting bracket. Bracket provides 2 different Full Cutoff Mounting angles. Can be mounted as uplight. Lamp supplied.

SPECIFICATIONS

Finish:

Chip and fade resistant polyester powder coating

Ground Mounting:

Use the new MPM19 Mighty Post with aluminum cap for sturdy installation

Housing:

Precision die cast aluminum. 1/2" NPS locking Swivel Arm, Wall Bracket Trunnion or Slip Fitter

Lens Frame & Glare Shield:

Precision die cast aluminum. Hinged for easy access. Phillips head screws for added security

Lens Gasket:

High temperature one piece molded silicone set in die cast retaining groove. Remains in place during relamping

Lens:

Thermal tempered shock resistant glass, 3/16" thick

Reflector:

Anodized aluminum. Field adjustable beam spread. Rotates 90° for horizontal or vertical lamp position

Socket:

HID: Porcelain 4kv Pulse Rated socket with nickel plated screw shell CFL: Plug in type, GX24q-4 base

UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground

EISA 2007 Compliant

This product complies with the new law for metal halide ballast efficiency. This law goes into effect January 1st, 2008. Pulse Start offers Longer Lamp Life, Faster Startup and Faster Restrike.

EPA:

Maximum EPA: 1.1

Patents:

Pat. D545,471

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts


Color:

Bronze

Weight:


14.7

DIMENSIONS

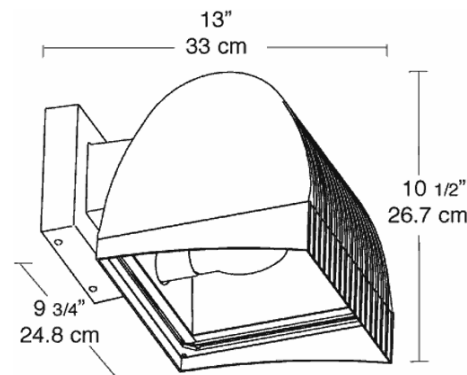

PHOTOMETRIC

175w Metal Halide @ 10' Mounting Height
Aimed 30° below horizontal.

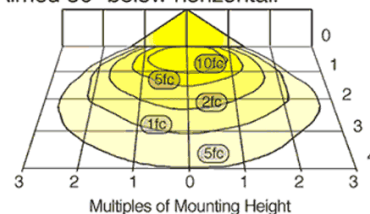

Mounting Height	Multiplier	Watts	Multiplier	HPS	MH	CFL
8'	1.6	175			1.0	
10'	1.0	150PS			1.0	
12'	.7	150	1.2		1.0	
16'	.4	100	.7		.7	
20'	.25	70	.5		.4	
		50	.3		.25	
		42				.23

ORDERING INFORMATION

Metal Halide

Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast
50	ED17	Medium	HX-HPF QT

Starting Amps/ Operating Amps	120V	208V	240V	277V
	.6/.6	.35/.35	.3/.3	.25/.25

Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
68	M110	3400	10000

Factory Installed Options

Add suffix to Catalog Number

Swivel Photocontrol wired for 120V (/PCS)
Single fusing for 120 and 277 volt (/F)

Double fusing for 208 and 240 volt (/FF)
Button Photocontrol wired for 120V (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com
© 2010 RAB Lighting, Inc.