

LFP16B

JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

PAR16 floodlight with die cast aluminum housing, integral glare shield and tempered lens. Sleek good looks with minimal size. Supplied with 6" leads and ground wire. Medium base PAR16 lamp, 60 watt max. Lamp not supplied.

SPECIFICATIONS

Compatibility:

Fixture is compatible with GE and Sylvania Par16 lamps. Not compatible with Philips Par16 lamp.

Housings:

Precision die cast aluminum

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Sockets:

Medium base porcelain with all copper current carrying components and spring loaded center contact.

Swivels:

1/2" NPS threaded arm with serrated locking swivel fits all standard mounting boxes. EZ Grip locknuts color matched to fixture.

UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground.

Voltage:

120


Color:

Black

Weight:

0.85

DIMENSIONS

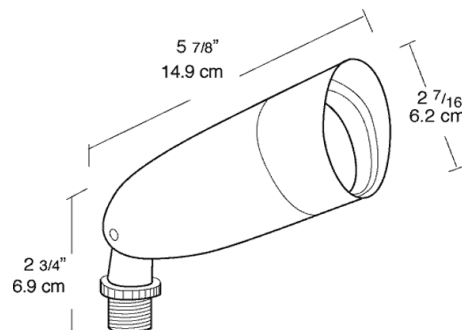

ORDERING INFORMATION

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
				120V	208V	240V	277V				
60	PAR16	Medium	0	0	0	0	0	0.0	0	650	2000

Factory Installed Options

Add suffix to Catalog Number

Note: Specifications may change without notice