

PS4-07-20WT

Square steel poles with welded tenon included for use with floodlights. Designed for ground mounting. Poles are stocked nationwide for quick shipment. Protective packaging ensures poles arrive at the job site good as new.

Color: Bronze

Weight: 225.0 lbs

Lamp Info

Type: N/A
Watts: 0W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 0
Lamp Lumens: 0
Efficacy: N/A

Ballast Info

Type: N/A
120V: N/A
208V: N/A
240V: N/A
277V: N/A
Input Watts: 0W
Efficiency: N/A

Technical Specifications

CSA Listed:

Suitable for wet locations.

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover.

Base Plates:

36,000 p.s.i. minimum yield.

Shipping Protection:

All poles are shipped in individual corrugated cartons to prevent finish damage.

Color:

Bronze powder coating.

Terms of Sale:

Pole Terms of Sale is available .

Height:

20 FT.

Gauge:

7

Wall Thickness:

3/16"

Shaft Size:


4".

Hand Hole Dimensions:

3" x 6".

Bolt Circle:

9".

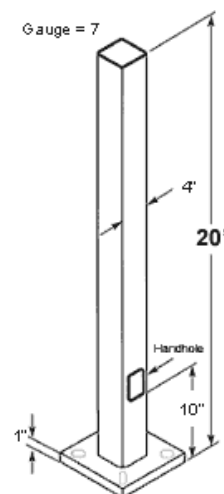

Base Dimension:

10".

Weight:

225 lbs.

Anchor Bolt:

Galvanized anchor bolts and galvanized hardware and anchor bolt template. All bolts have a 3" hook.

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available .

Pre-Shipped Anchor Bolts:

Bolts can be pre-shipped upon request for additional freight charge.

MaxEPA's/Max Weights:

70MPH 16.2 ft_/390 lb
80MPH 11.8 ft_/285 lb
90MPH 8.7 ft_/205 lb
100MPH 6.3 ft_/150 lb
110MPH 4.5 ft_/110 lb
120MPH 3.1 ft_/75 lb
130MPH 2.0 ft_/50 lb
140MPH 1.1 ft_/30 lb
150MPH 0.4 ft_/10 lb.