



# WPLED20Y/PC



JOB NAME: \_\_\_\_\_  
 DATE: \_\_\_\_\_  
 TYPE: \_\_\_\_\_

## DESCRIPTION

LED 20 Watt Wallpacks

## SPECIFICATIONS

### Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

### Finish:

Chip and fade resistant polyester powder coat finish.

### For use on LEED Buildings:

IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction.

### Gaskets:

High Temperature Silicone

### IESNA LM-79:

RAB LED luminaires comply with the IESNA LM-79 testing procedure, which measures performance qualities of LED luminaires to allow for a true comparison of luminaires regardless of the light source.

### Patents:

The WPLED20 design is protected under patents pending in the U.S., Canada, China, Taiwan and Mexico.

### UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground.

### Warranty:

RAB LED fixtures give you peace of mind because both the fixture and light engine components are backed by RAB's 5 Year Warranty. For more information,

### Color Accuracy:

74 CRI

### Driver:

Automatic Voltage Sensing Driver for 120 – 277 volts

### Fixture Efficacy:

32 Lumens per Watt

### Green Technology:

RAB LEDs are Mercury and UV free.

### Heatsink:

Integral cast aluminum mounting pad and external fins for optimal heat sinking to ensure cool operation with maximum LED life and light output.

### Housing:

Precision die cast aluminum housing, lens frame and mounting plate.

### LED Light Engine:

Two Multi-chip 10W high output long life LED Driver: Constant Current, Class 2

### Light Color:

2754 K (Warm White)

### Photocell:

Button Photocell installed and wired for 120V

### Total Harmonic Distortion:

THD = 8.1%

### Two Mounting Options:

Junction Box with 5 Conduit Entry Points and Threaded Plugs for surface mounting plus Cover Plate for mounting over 4" recessed junction box included with WPLED20



### Color:

Bronze

### Weight:

6.1

## DIMENSIONS

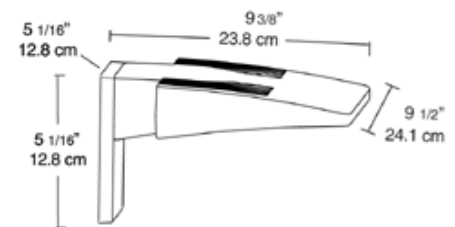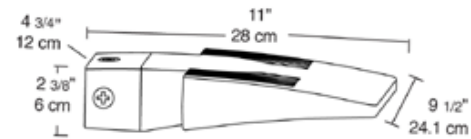

## ORDERING INFORMATION

LED Lamp supplied with fixture	Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps				Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
	20	Light Emitting Diode	Therm al Heatsink	Constant Current	0.5	0.5	0.5	0.125	22	N/A	704	50000
<b>Factory Installed Options</b> Add suffix to Catalog Number					Photocontrol for 277V (P2)							
					Photocontrol for 120V (/PC)							

Note: Specifications may change without notice