
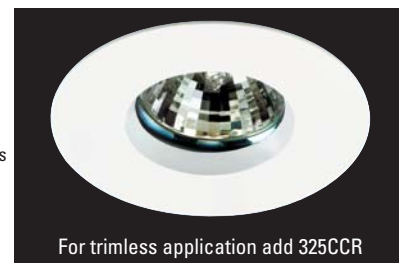


Sliver Low Voltage Halogen

7860

Downlight



For trimless application add 325CCR

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.
Lens: Clear.

LAMP: (not included) When using IR lamps, 37W Max.
(1) 50W max. MR16 GU5.3

TRANSFORMER:

Low voltage solid state electronic.

Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

VOLTAGE:

Specify 120V or 277V.

CEILING CUT OUT:

3 3/8" Ø

LISTINGS:


Dry/damp/wet under covered ceiling.
Not wet listed for flush (325CCR) installation.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.
IBEW union made.


NOTES:

- Maximum ceiling thickness 1 inch.
Consult factory for other ceiling conditions.
- Maximum 2 lens options (size B).
- Use 325CCR trimless adapter for a smooth flush Sliver installation.
- 120V not compatible with AFCI circuit.



PHOTOMETRICS:

Distribution chart




Bare lamp photometrics
50W MR16 GU5.3 40°


Ft below	FC nadir	Dia. @ 50%
6.0	51.3	5.8
8.0	28.9	7.0
10.0	18.5	8.2
12.0	12.9	9.3
14.0	9.4	10.5
16.0	7.2	11.6

HOUSING INFORMATION


New Construction
325NC




IC/Airtight
325IC




Remote Transformer
325RM



Retrofit
325RT-35 (35W max.)



Retrofit
325RT-50



HOW TO SPECIFY

Trim	Finish	Housing	Voltage	Accessories
7860				
7860 Sliver Downlight, 50W Max. MR16 GU5.3	10 - White 12 - Brushed Stainless Steel 21 - Black 22 - Textured White 28 - Metalized Grey	325NC - New Construction 325IC - IC/Airtight 325RM - Remote Transformer 325RT-35 - Retrofit (35W max.) 325RT-50 - Retrofit	120V 277V 120V not compatible with AFCI circuit.	8177B - Hex Cell Louver 9143B - Frosted Lens 9153B - Anti UV Filter 9155B - Linear Spread Lens 9156B - Prismatic Spread Lens 9157B - Solite Lens 9199B - Frosted Borosilicate Lens ER - Emergency Relay 325CCR - Trimless Adapter