

VAPORPROOF CEILING FIXTURES



Durable, versatile and economical. Use RAB vaporproof incandescent or fluorescent lighting for non-hazardous locations

Die cast aluminum for superior durability

Set screw keeps guard securely in place

All brass hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

Junction box with sturdy mounting lugs

One piece die cast aluminum guards threaded for secure fit

UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations



High temperature silicone internal gaskets

Premium porcelain socket with 150°C 8" long leads

Adapter plate included with VC fixtures

Clear heat resistant glass globes standard Polycarbonate Permaglobes available

Packed partially assembled for fast installation



1,850 RAB Vaporproof Lights formed the Olympic Rings in the mountains above Salt Lake City

Product Information

Natural Fixture with:

clear glass & die cast guard

clear glass & wire clamp guard

clear glass globe (no guard)

clear Permaglobe (no guard)

white Permaglobe (no guard)

Fixture less globe

13 watt Fluorescent, 120 Volt Lamp included

22 watt Fluorescent, 120 Volt Lamp included

3/4" tapped hubs

Finish- Add suffix:

- Silver Gray
- White
- Black



Specifications

UL Listing:

Suitable for wet locations.
Suitable for use in dwellings.
Suitable for use with 90°C supply wiring.
Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

Wattage:

See catalog number chart for maximum wattage with clear glass, colored glass and Permaglobes.

Hub Size:

1/2" or 3/4" NPS. Metric size hub taps available. Consult factory.

Globes:

Clear thermal shock resistant soda lime glass standard. Colored and white glass globes available. Unbreakable RAB Permaglobes available in clear and in color. See page 136.

Reflectors:

Highly reflective white baked polyester epoxy powder finish over a heavy gauge aluminum base. Reflectors thread onto fixtures. See page 138.

Finish:

Natural unpainted finish standard. Painted finishes of Silver Gray (add suffix S), White (add W) and Black (add B). Other finish colors available. Consult factory.

Construction:

Die cast aluminum with brass screws

Guard:

One piece die cast aluminum with set screw

Wire Guard:

8 gauge steel wire with silver powder coat

Socket:

Incandescent: Premium porcelain with 150°C 8" leads attached. Fastened with 2 brass screws.

CFL: 13w = GX23-2 Base

22w = GX32d-2 Base

Patents:

The designs of RAB fixtures are protected under U.S. and international intellectual property laws.

Spec Sheets, Installation Manuals, Wiring Diagrams & Photometrics 24/7
www.rabweb.com > click "PRODUCTS"

Special Globes

Colored globes (White, Red, Blue, Green or Amber) in cylindrical or ball shapes are available in glass or polycarbonate. Order a vaporproof fixture less globe and combine it with a Globe from page 154.

Glass



Polycarbonate



VX 4" Box

Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. Incandescent up to 300 watts (lamp not supplied). CFL: 13 or 22 watts (lamp included).

- Finish:
- Natural
 - Silver Gray
 - White
 - Black



VX100DG shown in natural, silver gray, white and black

VP Pendant

Pendant mount, die cast aluminum construction. Medium base socket, 1/2" or 3/4" NPS pendant thread and a variety of globes. Incandescent up to 200 watts (lamp not supplied). CFL: 13 or 22 watts (lamp included).

- Finish:
- Natural
 - Silver Gray
 - White
 - Black



VP100DG shown in natural

VC Ceiling

Die cast aluminum construction. Mounts to existing surface or recessed 4" boxes. Adapter plate provided. Medium base socket and a variety of globes. Incandescent up to 150 watts (lamp not supplied). CFL: 13 or 22 watts (lamp included).

- Finish:
- Natural
 - Silver Gray
 - White
 - Black



VC100DG shown in natural

VLX 3" Box

Die cast aluminum with built-in 3" junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. Incandescent up to 150 watts (lamp not supplied). CFL: 13 or 22 watts (lamp included).

- Finish:
- Natural
 - Silver Gray
 - White
 - Black



VLX100DG shown in natural

Catalog Numbers

100 Series Max Watts	200 Series Max Watts
150w Clear Glass	300w Clear Glass
100w Colored Glass	200w Colored Glass
75w Permaglobe	100w Permaglobe
VX100DG	VX200DG
VX100G	VX200G
VX100	VX200
VX100P	VX200P
VX100PW	VX200PW
VX1	VX2
add /F13	
	add /F22
add -3/4	add -3/4
add S	add S
add W	add W
add B	add B

For Natural & 1/2" taps, no suffix needed.

100 Series Max Watts	200 Series Max Watts
150w Clear Glass	200w Clear Glass
100w Colored Glass	150w Colored Glass
75w Permaglobe	100w Permaglobe
VP100DG	VP200DG
VP100G	VP200G
VP100	VP200
VP100P	VP200P
VP100PW	VP200PW
VP1	VP2
add /F13	
	add /F22
add -3/4	add -3/4
add S	add S
add W	add W
add B	add B

For Natural & 1/2" taps, no suffix needed.

100 Series Max Watts	200 Series Max Watts
100w Clear Glass	150w Clear Glass
100w Colored Glass	100w Colored Glass
75w Permaglobe	100w Permaglobe
VC100DG	VC200DG
VC100G	VC200G
VC100	VC200
VC100P	VC200P
VC100PW	VC200PW
VC1	VC2
add /F13	
	add /F22
add -3/4	add -3/4
add S	add S
add W	add W
add B	add B


For Natural, no suffix needed.

100 Series Max Watts	200 Series Max Watts
150w Clear Glass	200w Clear Glass
100w Colored Glass	150w Colored Glass
75w Permaglobe	100w Permaglobe
VLX100DG	VLX200DG
VLX100G	VLX200G
VLX100	VLX200
VLX100P	VLX200P
VLX100PW	VLX200PW
VLX1	VLX2
add /F13	
	add /F22
add -3/4	add -3/4
add S	add S
add W	add W
add B	add B


For Natural, no suffix needed.

Dimensions



VX100DG & VX200DG

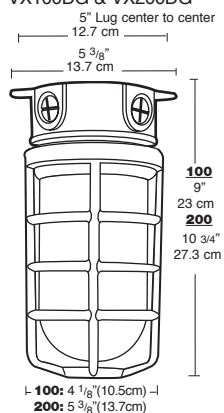

VP100DG & VP200DG

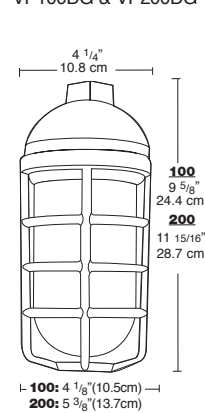

VC100DG & VC200DG

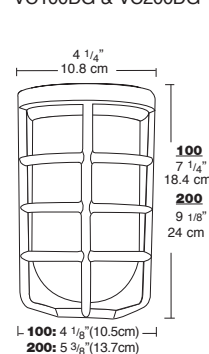

VCADPLT
Adapter plate
(VC fixtures only)

VLX100DG & VLX200DG

