



WALLPACKS TALLPACK™

Compact, low-cost Wallpack with uniform light output for outdoor security lighting. HPS, Metal Halide or CFL with photocell or sensor.



- Photocell for automatic dusk to dawn operation
- Vandal resistant polycarbonate housing on WPT Series
- Die formed aluminum reflector and prismatic polycarbonate refractor for wide light distribution
- Heavy, die cast aluminum back plate with box mounting template
- Heavy duty cast aluminum housing on WPTG Series
- Shades work great with Tallpacks! (see pg. 54)
- Heavy prismatic glass refractor
- Packaging has product features, ballast and lamp specifications plus lighting layout photometrics and installation instructions
- 1/2" bottom conduit knockout



PULSE START
Metal Halide
• SAVE ENERGY \$\$
• LONGER LAMP LIFE
• FASTER START TIME
• BETTER LUMEN MAINTENANCE
• LAMPS REMAIN SAME COLOR
• COLD STARTING TO -40°
UTILITY REBATES POSSIBLE

Product Information

	Watts	Lamp Type	Lamp Base	Ballast	Starting Amps / Operating Amps				Input Watts	Lamp ANSI	Initial Lumens	Lamp Hours
					120V	208V	240V	277V				
High Pressure Sodium Lamp supplied with fixture	35	ED17	Med	R-NPF 120V	1.4 / 0.9				46	S76	2,250	24,000
	50	ED17	Med	R-NPF 120V	1.8 / 1.2				62	S68	4,000	24,000
	70	ED17	Med	R-NPF 120V	2.1 / 1.6				86	S62	6,300	24,000
	70	ED17	Med	HX-HPF QT	.8 / .9	.5 / .5	.4 / .4	.4 / .4	91	S62	6,300	24,000
	100	ED17	Med	R-NPF 120V	3.1 / 2.1				115	S54	9,500	24,000
	100	ED17	Med	HX-HPF QT	1.3 / 1.2	.8 / .7	.7 / .6	.6 / .5	130	S54	9,500	24,000
Compact Fluorescent Lamp supplied with fixture	28	Quad	GX32d-3	NPF 120V	.6 / .2				26		1,200	10,000
	42	Triple	GX24q-4	Electronic QT	.38	.25	.20	.17	47		3,200	12,000
Metal Halide Lamp supplied with fixture PS★ = Pulse Start	50	ED17	Med	HX-NPF 120V	2.0 / 1.6				69	M110	3,400	10,000
	50	ED17	Med	HX-HPF 120V	.8 / .7				69	M110	3,400	10,000
	50	ED17	Med	HX-HPF DT	.6 / .7			.3 / .3	72	M110	3,400	10,000
	70	ED17	Med	HX-NPF 120V	2.5 / 2.1				94	M98	5,600	15,000
	70	ED17	Med	HX-HPF QT	.6 / .9	.3 / .5	.3 / .5	.3 / .4	90	M98	5,600	15,000
	100	ED17	Med	HX-HPF QT	1.2 / 1.2	.8 / .7	.7 / .6	.6 / .5	129	M90	9,000	15,000

Accessories



Specifications


- UL Listing:**
Suitable for wet locations
- Housing & Refractor:**
WPTS
Vandal resistant polycarbonate molded refractor. Die cast Aluminum back plate.
WPTG
Heavy die cast aluminum housing with prismatic glass refractor.
- Reflector:**
Die formed aluminum for wide light distribution.
- Ballast Housing:**
Stamped steel painted white

- Back Plate:**
Heavy die cast aluminum. 1/2" bottom conduit knockout. Knockouts for mounting to 3" or 4" junction boxes.
- Socket:**
HPS: Porcelain 4kv Pulse Rated
CFL: 28w = GX32d-3, 42w = GX24q-4
- Sensor Switching Capacity:**
250 watts fluorescent on WPTFMS model only. 120 volt only.
- Sensor Time Adjustment:**
5 seconds to 15 minutes
- Sensor Detection Zone:**
Full 180° by 30'

Info Online 24/7

Installation Manuals, Wiring Diagrams and Photometrics
www.rabweb.com > click "PRODUCTS"

Photometrics

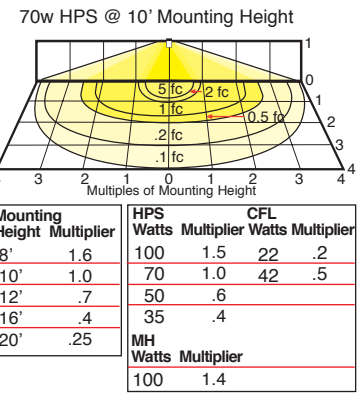

Tallpack Die Cast w/ Glass

Heavy duty die cast aluminum housing with prismatic glass refractor. HPS and Metal Halide models available. with 1/2" bottom and back conduit knockout. Factory installed photocell optional. Lamp included.

Finish: ● Architectural Bronze
○ White



HPS Tallpack

HPS "Tall" Wallpack. Vandal resistant polycarbonate housing. Heavy die-cast aluminum back plate with 1/2" bottom and back conduit knockout. Factory installed photocell optional. Lamp included.

Finish: ● Architectural Bronze
○ White



Fluorescent Tallpack

28 & 42 watt compact fluorescent Tallpack. Vandal resistant polycarbonate housing. Heavy die-cast aluminum back plate with 1/2" bottom and back conduit knockout. Factory installed photocell optional. Operating temperature 28w (-20°F), 42w (0°F). Lamp included.

Finish: ● Architectural Bronze
○ White



Fluorescent Smart Tallpack

28 & 42 watt compact fluorescent Tallpack with built-in mini sensor for motion activated operation. Vandal resistant polycarbonate housing. Sensor has 180° detection and controls up to 250 watts. 120 volt only. Lamp included.

Finish: ● Architectural Bronze
○ White



Catalog Numbers

For white fixture finish add suffix "W"

Photocell	No Photocell
WPTGSN70/PC	WPTGSN70
WPTGSH70QT/PC▲	WPTGSH70QT
WPTGSN100/PC	WPTGSN100
WPTGSN100QT/PC▲	WPTGSH100QT
▲Specify Photocell voltage	
WPTGHN50/PC	WPTGHN50
WPTGHH50/PC	WPTGHH50
WPTGHH50QT/PC▲	WPTGHH50QT
WPTGHN70/PC	WPTGHN70
WPTGHH70QT/PC▲	WPTGHH70QT
WPTGHH100QT/PC▲	WPTGHH100QT
GDWPTG	GDWPTG
SHC1	SHC1
SHR1	SHR1

For white fixture finish add suffix "W"

Photocell	No Photocell
WPTS35	WPTS35NPC
WPTS50	WPTS50NPC
WPTS70	WPTS70NPC
SHC1	SHC1
SHR1	SHR1




For white fixture finish add suffix "W"

Photocell	No Photocell
WPTF28	WPTF28NPC
WPTF42▲	WPTF42NPC
SHC1	SHC1
SHR1	SHR1

For white fixture finish add suffix "W"

With Sensor
WPTF28MS (120 volt only)
WPTF42MS (120 volt only)
SHC1
SHR1

Dimensions

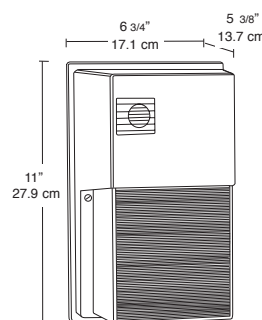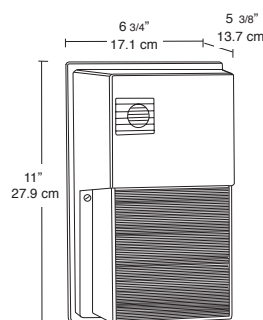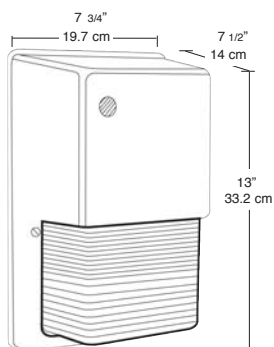

Detection Pattern

