



D/I-C

JOB NAME:

FIXTURE TYPE:

RECESSED CENTER BASKET

FEATURES

- Provides indirect, soft, uniform illumination.
- Curved perforated details combine recessed fixture advantages with efficient indirect shielding.
- Perforated center basket, backed with reflective white acrylic, controls glare and veiling reflections.
- Shielding is easily removed for relamping.
- Flanged fixture available for plaster ceilings.
- Available in array of custom colors.

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel housing unitized into one piece.
- **ELECTRICAL**
Electronic HPF ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
Perforated diffuser element with matte white acrylic overlay.
- **FINISH**
All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. label labels.



Recessed Center Basket

Ordering Matrix


MODEL	LAMPS	WATTAGE	BALLAST	VOLTAGE	OPTIONS
D/I-22-C	1	F-40BX	T8/EB	120	M
	2	F-50BX	T5/EB	277	DM
	3	F-55BX F-14T5 F-17T8 F-24T5HO	T5HO/EB	DUAL	DC I/O EM
D/I-24-C	2	F-32T8			2CKT
	3	F-28T5			CC
	4	F-54T5HO F-40BX F-50BX F-55BX			HR IOC

T8/EB: Electronic Ballast
T5/EB: Electronic Ballast
T5HO/EB: Electronic Ballast

M: Flanged Unit
DM: Dimming Ballast
DC: Dust Cover
I/O: Factory Installed I/O Module
EM: Emergency Battery Pack
2CKT: Two-circuit wiring
CC: Custom Color
HR: Heat Removal Slots
IOC: Integral Occupancy Sensor

Example: If you wanted to specify D/I-24-C fixture with two 32-watt lamps, T8 electronic ballast with a dust cover, your model number would read as follows:

D/I-24-C-232T8-DC

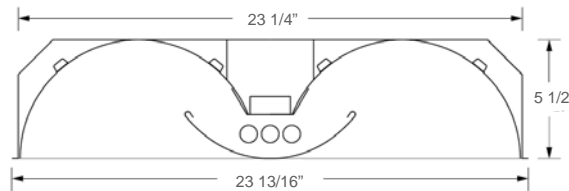

Dimensions subject to change. Consult factory for critical applications.