

RENBL1L26120

Ballast Type: Electronic
 Input Voltage: 120VAC±10%
 Input Frequency: 50/60 Hz.

Starting Method: Preheat Rapid Start
 Lamp Connection: Series
 Unit Color: Raw

Unit Weight: 0.25 lb.
 Carton Quantity: 84
 Skid Quantity: 2688

ELECTRICAL SPECIFICATION:

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram	B.E.F.
120	CFQ26W/G24q, CFTR26W/GX24q	26	1	0.34	23	≥0.52	≤150	≤1.6	0.85	103	3.70
120	CFQ18W/G24q, CFTR18W/GX24q	18	1	0.30	20	≥0.52	≤150	≤1.6	1.05	103	5.25
120	FT24W/2G11	24	1	0.31	20	≥0.52	≤150	≤1.7	0.80	103	4.00
120	FT18W/2G11RS	18	1	0.27	18	≥0.52	≤150	≤1.7	0.90	103	5.00
120	FT18W/2G11	18	1	0.32	21	≥0.52	≤150	≤1.7	0.80	103	3.81
120	CFS28W/GR10q	28	1	0.35	24	≥0.52	≤150	≤1.7	0.85	103	3.54
120	CFS21W/GR10q	21	1	0.30	21	≥0.52	≤150	≤1.7	0.90	103	4.29
120	CFT13W/2GX7	13	1	0.22	13	≥0.52	≤150	≤1.7	0.95	103	7.31
120	F25T8 F25T8U	25	1	0.35	24	≥0.52	≤150	≤1.7	0.90	003	3.75
120	F17T8 F17T8U	17	1	0.28	18	≥0.52	≤150	≤1.7	0.95	003	5.28
120	F15T8	15	1	0.22	16	≥0.52	≤150	≤1.7	0.95	003	5.94

PERFORMANCE:

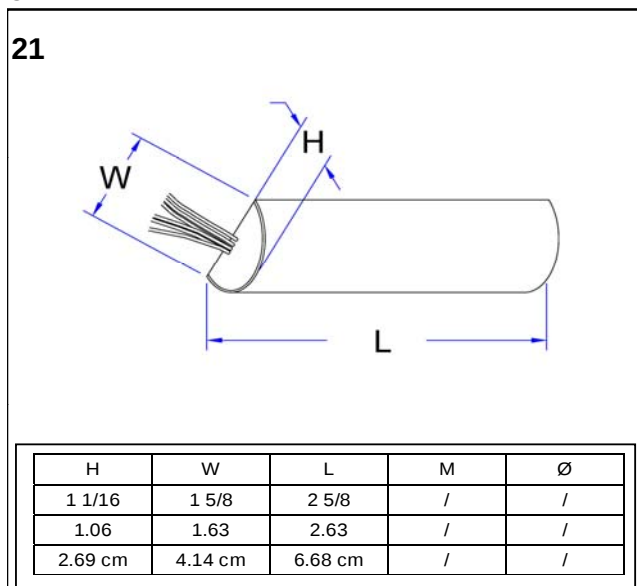
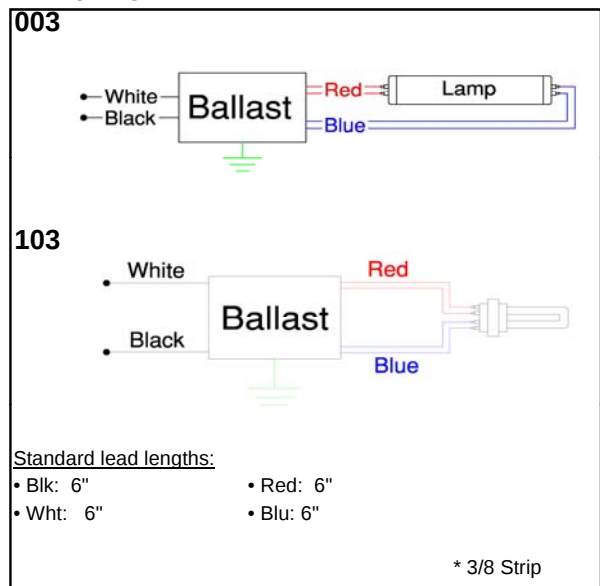
- Electronic ballast
- Preheat rapid start
- Series operation
- Normal power factor
- Encased & potted
- Sound rated A
- Internal surge protection
- Meets ANSI standard C82.11
- Meets ANSI standard C62.41

APPLICATION:

- Maximum case temperature: 167°F/75°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 0°F/-18°C
- Lamp starts: >15,000 starts
- Remote mounting: 18 ft.

SAFETY:

- UL/935 (Class P, Type 1 outdoor) recognized component
- CSA/C22.2 certified
- Inherent Thermal Protection
- No PCB's
- RoHS Compliant

STYLE:

WIRING DIAGRAM:

WARRANTY:

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide ballasts, call 1-800-323-5633 or visit www.robertsonww.com. Specifications subject to change without notice.

Revised 12/21/10

ROBERTSON WORLDWIDE

 13611 Thornton Rd, Blue Island, IL 60406, TEL: 1-800-323-5633, FAX: 1-877-388-2420, www.robertsonww.com