


Fluorescent Slot Flush Lens

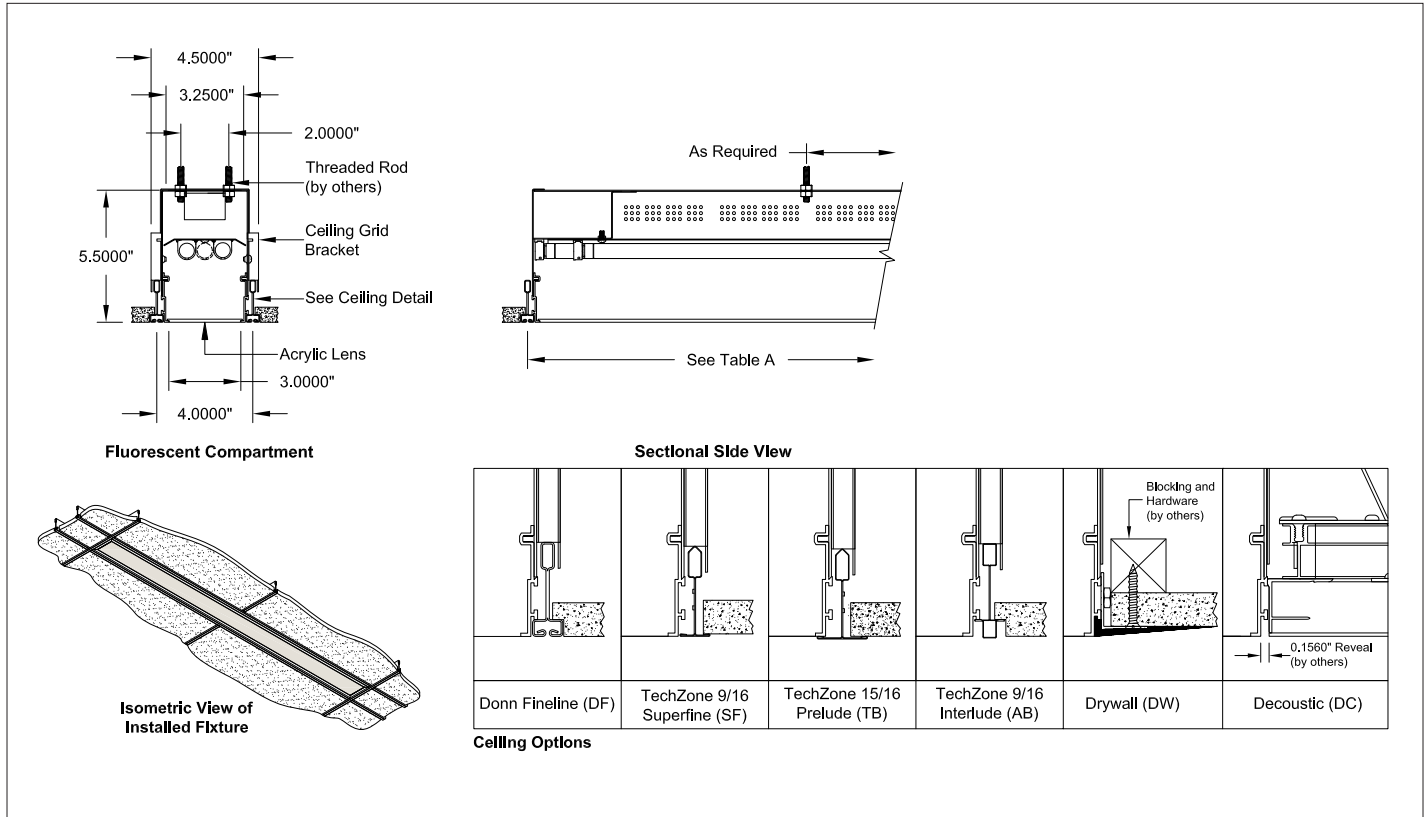

VL4- T - - -W-

of Fluor Lamps in Cross Section Fluor Lamp Wattage Ballast Length Ceiling Options Voltage

# of Fluor Lamps in Cross Section	Fluor Lamp Wattage	Ballast	Length	Ceiling Options	Voltage
<input type="checkbox"/> 1	See Configuration Page on Back	<input type="checkbox"/> E (Electronic)	<input type="checkbox"/> 24"	<input type="checkbox"/> DF	<input type="checkbox"/> 1 (120V)
<input type="checkbox"/> 2		<input type="checkbox"/> C (Eco-10)	<input type="checkbox"/> 36"	<input type="checkbox"/> SF	<input type="checkbox"/> 2 (277V)
		<input type="checkbox"/> H (Hi-lume)	<input type="checkbox"/> 48"	<input type="checkbox"/> TB	
			<input type="checkbox"/> 72"	<input type="checkbox"/> AB	
			<input type="checkbox"/> 96"	<input type="checkbox"/> DW	
				<input type="checkbox"/> DC	

Description

Linear flush Fluorescent Slot fixture. Flexible configurations for all lamp styles and wattages. Standard lens, DuraFrost acrylic. For lens options, consult factory.

Features

- The VersaLux slot system provides access from below the ceiling to the ballast and wiring compartment for servicing.
- Multiple lamp wattages, lengths and configurations are available.
- Integral Thermal Protection.

Fixture Specifications

Dimensions: (Spec)"L x 4.000"W x 5.500"H
 Finish: White (standard).
 Custom finishes, consult factory.
 Weight: Approx. 6 lbs. per linear foot.

Electrical

- Power consumption: Per specification.
- Ambient temperature 90° F. maximum.
- Integral electronic ballast(s).
- Through branch wiring capable.
- 120 VAC or 277 VAC.
- UL listed.

Mounting

Universal mounting brackets included. Contact factory for special ceiling conditions.
 Ceiling Cutout: (Spec)"L x 4.000"W

Photometry, refer to page 3.













All designs and scaled drawings shall remain the property of STARFIRE LIGHTING, INC., and may not be reproduced or transmitted without expressed written consent. STARFIRE LIGHTING, INC. reserves the right to make changes on approved designs to facilitate manufacturing methods to the extent that such changes do not compromise design integrity.

Configuration Page

1 - Choose fixture configuration below

2 - Select desired fluorescent lamp wattage

Custom Configurations on Request

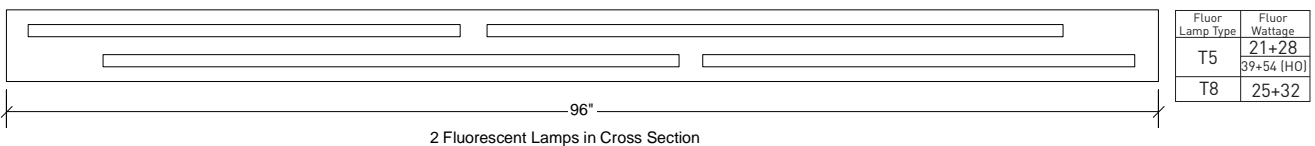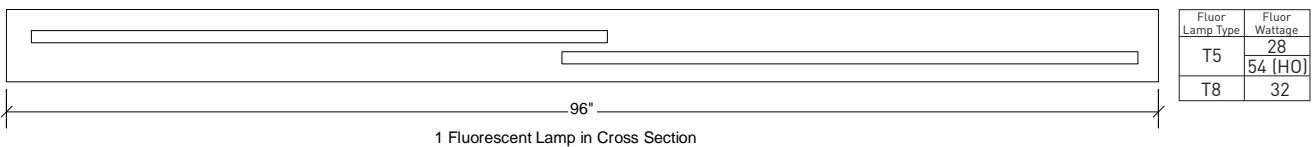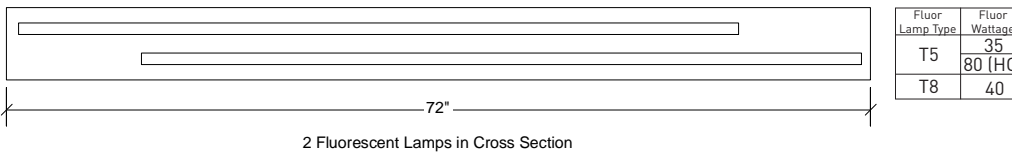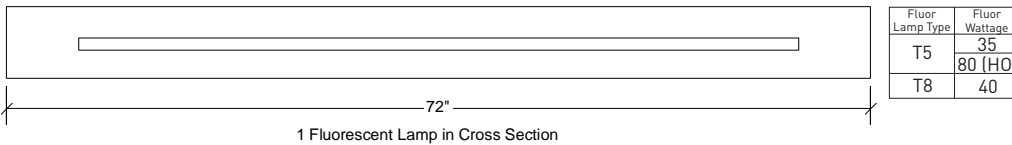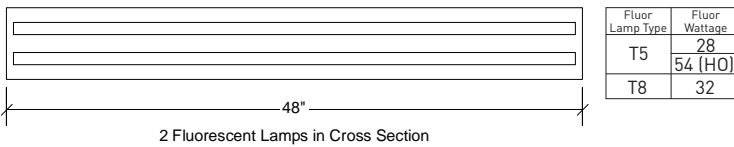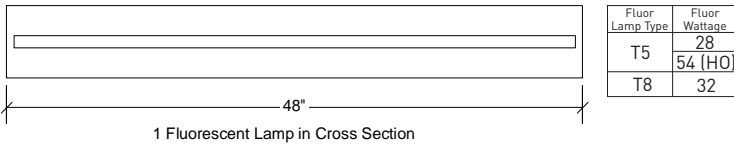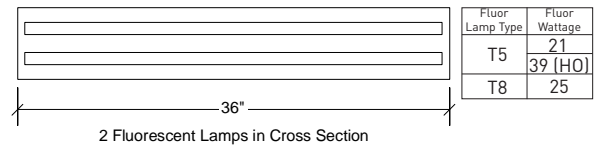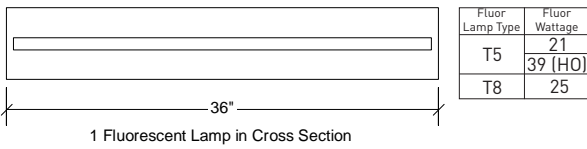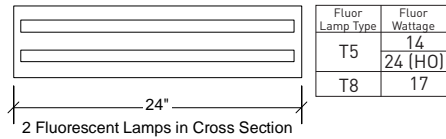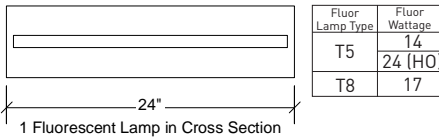

VL4 Fluorescent Slot Flush Lens



Fixture Photometrics

Photometry reports for other fixture configurations, consult factory

1- T5 Lamp

28 Watt

DuraFrost Acrylic Lens

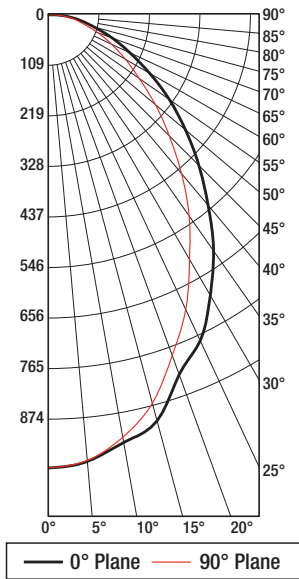

Candela Distribution

	0	22.5	45	67.5	90
0	979	979	979	979	979
5	969	970	966	983	967
15	909	895	885	882	869
25	777	764	736	717	703
35	623	610	569	537	531
45	461	448	406	378	370
55	319	303	277	252	240
65	195	185	168	154	151
75	103	99	89	84	80
85	40	35	33	32	34
90	9	7	6	5	6

Zonal Lumen Summary

0-5	46
5-10	89
10-15	126
15-20	152
20-25	171
25-30	180
30-35	180
35-40	173
40-45	160
45-50	143
50-55	125
55-60	105
60-65	85
65-70	66
70-75	48
75-80	34
80-85	19
85-90	2

Utilization



RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	79	79	79	79	77	77	77	77	73	73	73	70	70	70	67	67	67	66
1	73	70	67	65	71	68	66	64	65	63	62	63	61	60	57	57	57	57
2	67	62	57	54	65	60	57	53	58	55	52	56	53	51	49	49	49	48
3	61	55	50	46	60	54	49	46	52	48	45	50	47	44	42	42	42	42
4	57	49	44	40	55	48	43	40	47	42	39	45	42	39	37	37	37	37
5	52	45	39	35	51	44	39	35	42	38	34	41	37	34	32	32	32	32
6	49	41	35	31	48	40	35	31	39	34	31	38	34	30	29	29	29	29
7	45	37	32	28	44	37	31	28	36	31	28	35	30	27	26	26	26	26
8	43	34	29	25	42	34	29	25	33	28	25	32	28	25	24	24	24	23
9	40	32	26	23	39	31	26	23	30	26	23	30	26	23	21	21	21	21
10	38	29	24	21	37	29	24	21	28	24	21	28	24	21	20	20	20	2

Total Luminaire Efficiency: 65.80%

2- T5 Lamps

28 Watt

DuraFrost Acrylic Lens

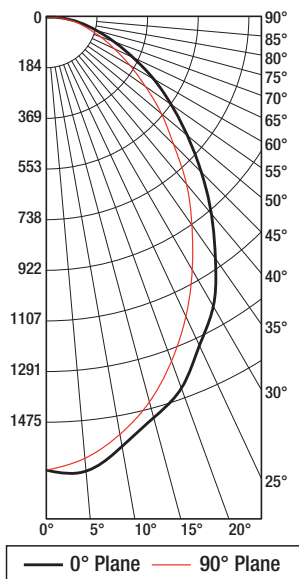

Candela Distribution

	0	22.5	45	67.5	90
0	1650	1650	1650	1650	1650
5	1660	1631	1642	1617	1613
15	1510	1503	1493	1490	1451
25	1320	1292	1266	1224	1203
35	1074	1044	999	945	924
45	798	772	730	673	655
55	555	530	490	452	441
65	349	331	304	283	273
75	190	180	167	156	153
85	75	67	61	60	60
90	19	13	10	10	13

Zonal Lumen Summary

0-5	78
5-10	151
10-15	212
15-20	261
20-25	292
25-30	311
30-35	313
35-40	303
40-45	281
45-50	254
50-55	221
55-60	188
60-65	153
65-70	121
70-75	89
75-80	63
80-85	35
85-90	3

Utilization

RC	80				70				50			30			10			Flux
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	69	69	69	69	67	67	67	67	64	64	64	61	61	61	59	59	59	58
1	63	61	58	56	62	59	57	55	57	55	54	55	53	52	50	50	50	49
2	58	54	50	47	56	52	49	46	50	48	45	49	46	44	42	42	42	42
3	53	48	43	40	52	47	43	39	45	42	39	43	41	38	36	36	36	36
4	49	43	38	34	48	42	38	34	41	37	34	39	36	33	32	32	32	32
5	45	39	34	30	44	38	33	30	37	33	30	36	32	29	28	28	28	28
6	42	35	30	27	41	34	30	27	33	29	26	33	29	26	25	25	25	25
7	39	32	27	24	38	32	27	24	31	27	24	30	26	23	22	22	22	22
8	37	29	25	22	36	29	25	21	28	24	21	28	24	21	20	20	20	20
9	35	27	23	20	34	27	23	20	26	22	19	26	22	19	18	18	18	18
10	32	25	21	18	32	25	21	18	24	21	18	24	20	18	17	17	17	1

Total Luminaire Efficiency: 57.60%