

TYPE NO. \_\_\_\_\_

CATALOG NO. \_\_\_\_\_




# 16" & 22" Worker Series Glo Bay



## ORDERING INFORMATION

Catalog Number: Example: WBG16400MAB-8

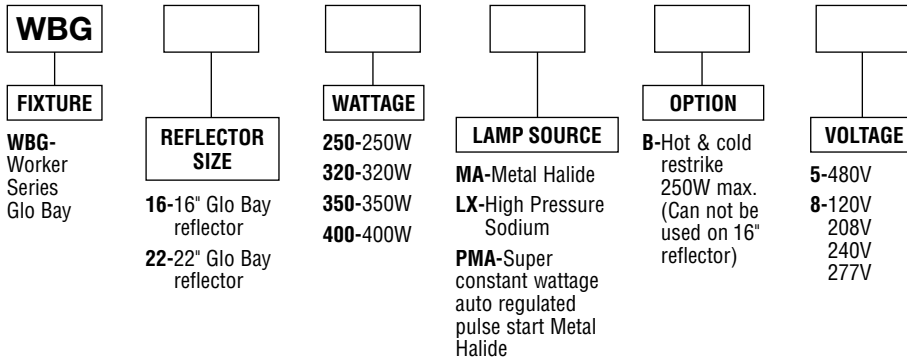

\*250W fixture must be enclosed. Order 16BE separately.

## OPTIONS/ACCESSORIES

**715NEW**-Open-loop hook.

**714S**-Closed-loop hook.

**3CP**-3 ft. cord, 20 Amp plug, specify voltage. Use with 713S, 723S.

**SF**-Single fusing for 120V, 277V.

**DF**-Double fusing for 208V, 240V, 277V.

Accessories - See page 4-A

## COMPONENTS/OPTICS

CATALOG NUMBER	DESCRIPTION
<b>STEEL POWERPACK</b>	
STP400MA-8	400W MH POWERPACK
STP400MAB-8	400W MH POWERPACK WITH QUARTZ OPTION
STP250MA-8	250W MH POWERPACK
STP250MAB-8	250W MH POWERPACK WITH QUARTZ OPTION
STP400LX-8	400W HPS POWERPACK
STP400LXB-8	400W HPS POWERPACK WITH QUARTZ OPTION
STP350PMA-8	350W PULSE START POWERPACK
STP350PMAB-8	350W PULSE START POWERPACK WITH QUARTZ OPTION
STP320PMA-8	320W PULSE START POWERPACK
STP320PMAB-8	320W PULSE START POWERPACK WITH QUARTZ OPTION
STP250LX-8	250W HPS POWERPACK
STP250LXB-8	250W HPS POWERPACK WITH QUARTZ OPTION

### OPTICS

G16R	16 INCH ACRYLIC REFLECTOR
G22R	22 INCH ACRYLIC REFLECTOR

### ENCLOSURES

22DL	22 INCH DROP REFRACTOR FOR G22R
P16L	16 INCH DROP REFRACTOR FOR G16R
P22L	22 INCH DROP REFRACTOR FOR G22R

## PRODUCT SPECIFICATIONS

- The Worker Bays are ideal for general purpose industrial lighting including warehouse facilities, assembly areas, gyms, hangars, transportation garages, loading and staging area. Indoor applications where ceiling height exceeds 15 feet.
- Die formed steel ballast housing, white polyester powder finish.
- Wiring access cover plate with additional 3/4" knockouts for thru-wire connections (thru-wire box included).
- Field adjustable light distribution patterns.
- Constant wattage, autotransformer (CWA) high power factor ballast or equivalent, capable of starting and operating at -30° Celsius minimum.
- Die-cast plate tapped 3/4" NPS accepts 3/4" pipe or 715NEW/714S die cast hook.
- Removable steel wiring compartment door for quick and easy mounting, allowing for hands free mounting.
- 40° Celsius rating.



UL Damp Location Listed.

Available from www.GoodMart.com

