



Electronic Circline™ Replaceable Ballast


- Energy Efficient Compact Fluorescent
- Long Life - 50,000 Hours

Product Specifications

Item #	Wattage	Description	Input Line Current	Length (inches)	Diameter (inches)	Harmonic Distortion	Power Factor
12522Q	22	HPF, Replaceable Ballast	.20A	1.35	2.50	< 24%	>.95
12530Q	30	HPF, Replaceable Ballast	.25A	1.35	2.50	< 24%	>.95
12536Q	36	HPF, Replaceable Ballast	.32A	1.35	2.50	< 24%	>.95
17022Q	22	NPF, Replaceable Ballast	.40A	1.35	2.50	< 150%	>.50
17030Q	30	NPF, Replaceable Ballast	.44A	1.35	2.50	< 150%	>.50
17036Q	36	NPF, Replaceable Ballast	.49A	1.35	2.50	< 150%	>.50
17040Q	40	NPF, Replaceable Ballast	.66A	1.35	2.50	< 150%	>.50
17058Q	58	NPF, Replaceable Ballast	.80A	1.35	2.50	< 150%	>.50
16530Q	30	NPF, Replaceable Ballast	.28A	2.00	2.50	< 150%	>.50
16555Q	55	NPF, Replaceable Ballast	.86A	2.00	2.50	< 150%	>.50
16565Q	65	NPF, Replaceable Ballast	.92A	2.00	2.75	< 150%	>.50

Specifications (at full brightness)

Ballast Type -----	Electronic, Replaceable
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	50/60HZ
Ballast Life (rated) -----	50,000 Hours
Minimum Starting Temperature --	-20 ° F
Maximum Operating Temperature -	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Maximum Open Circuit Voltage --	600V
End of Life Protection-----	Yes

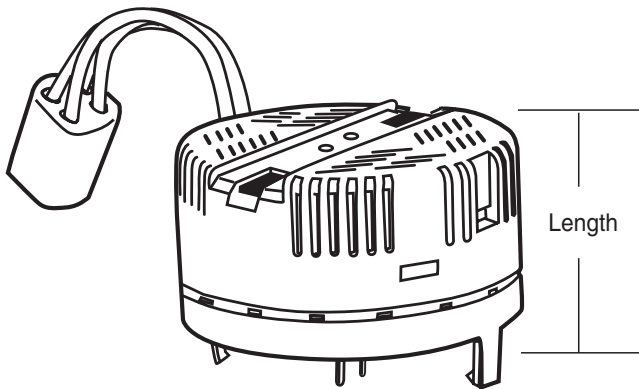

Replaceable
Circline™
Ballast



ISO 9002
CERTIFIED

2 YEAR
WARRANTY