





289 Series Specifications

T2 SpringLamp® Compact Fluorescent, NPF

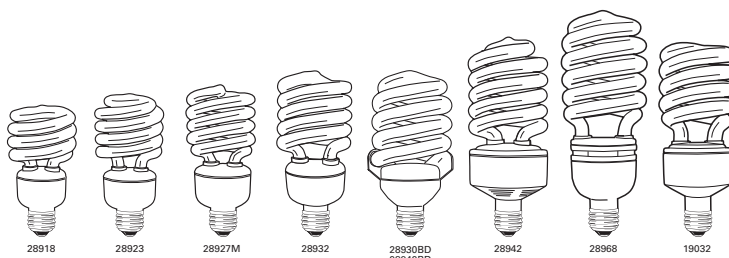

Ideal for:



Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (inches)	Diameter (inches)	Life vs. Incandescent	Table/ floor Lamps	Chandeliers	Recessed Cans	Bare bulb Fixtures	High Bay Fixtures	Ceiling Fixtures	Desk Lamp	Outdoor Lights
28918	18	75	1200	.30A	4.6	2.4	13X	•	•	•	•		•		•
28923 ★	23	100	1600	.38A	4.6	2.4	13X	•	•	•	•		•		•
28923FS	23	100	1200	.38A	5.0	2.4	13X	•	•	•	•				•
28927	27	100	1850	.45A	5.7	2.7	13X	•	•		•				
28927M	27	100	1850	.45A	5.1	2.4	13X	•			•				
28930BD	30	120	2100	.50A	5.4	3.0	13X	•							
28932	32	130	2100	.53A	6.1	2.7	13X	•			•				
28942	42	150	2800	.70A	7.3	2.8	13X	•			•	•			
28942BD	42	150	2650	.70A	5.7	2.7	13X	•							
28968	68	300	4200	1.13A	9.5	4.1	13X					•			
19032	14/19/32	40/75/150	450/1100/1950	.53A	6.8	2.4	8X	•						•	

★ = FS = Full Spectrum 5500°K, 90CRI, BD = Base Down use only

Special Application Options (Ordering Suffix)


- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K), 6500°K (65K)
- Long Neck 1.65"(165), 1.75"(175), 2.25"(225)
- Wet location (WL) • Shatter Resistant (SS)

Special Notes

68 watt is NOT for use in recessed cans. Use in an enclosed recessed can voids the warranty.
 27 watt and above NOT recommended for a totally enclosed glass trim covered recessed can.
 Use a 27 watt in an open recessed can with no cover.
 Up to 23 watt is UL approved for totally enclosed fixtures.

Energy Savings (SpringLamp® compared to incandescent)

Save electricity costs by using less wattage with the same light output as an incandescent.

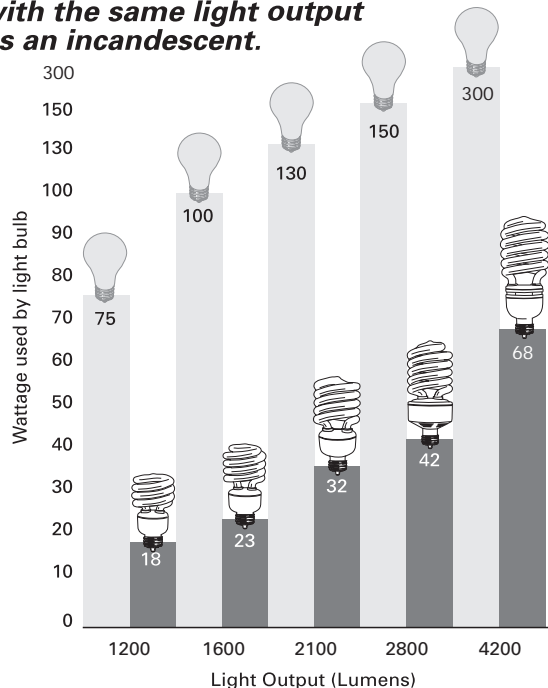

Features and Benefits

- NEW Small size
- NEW Amalgam Technology- provides cooler operating temperatures for consistent performance in any position
- Long life, 10,000 hour average rated life
- No lead glass- Better lumen maintenance over life of bulb
- 2700°K color temperature closest to incandescent light
- Medium base
- Replace less often, ideal for hard to reach places
- End of Life logic guards against violent failures
- 15 Month Warranty

Specifications (at full brightness)

End of Life Protection----- Yes
 Ballast Type ----- Electronic
 Starting Method ----- Modified Rapid Start
 Input Line Voltage ----- 120VAC
 Input Line Frequency ----- 50/60HZ
 Lamp Life (rated) ----- 10,000 Hours
 Color Temperature ----- 2700°K
 Color Rendering Index ----- 84
 Minimum Starting Temperature -- -20 ° F
 Maximum Operating Temperature - 160 ° F
 U.L. / C.U.L. Listed ----- Yes
 FCC Compliance ----- Part 18, Subpart C
 Lamp Operating Frequency ----- 45 KHZ
 Lamp Current Crest Factor ----- < 1.60
 Maximum Open Circuit Voltage -- 600V
 Power Factor ----- > .50
 Total Harmonic Distortion ----- < 150%



15 MONTH WARRANTY



P: 1.800.342.1496 F: 1.330.995.1300
 Visit us at www.tcpi.com
©TCP 2005/00245