






Globe Lamps G25, G30, G40 SERIES SPECIFICATIONS

Lamp Type: One Piece Compact Fluorescent Decorative Globe, NPF, 8,000 Hours average rated life


Item #	Wattage	Incandescent Wattage Comparison	Initial Lumens	Input Line Current	M.O.L. (Inches)	Diameter (Inches)	Base
1G2504	4	25	250	.07A	4.2	3.1	Medium
1G2509	9	40	495	.15A	4.2	3.1	Medium
1G2509C	9	40	495	.15A	4.2	3.1	Candelabra
1G2514 ★	14	60	800	.23A	4.7	3.1	Medium
1G3009	9	40	495	.15A	5.0	3.7	Medium
1G3014 ★	14	60	800	.23A	5.0	3.6	Medium
1G3019 ★	19	60	950	.32A	4.9	3.7	Medium
1G4014	14	60	800	.23A	6.8	5.0	Medium
1G4019	19	75	925	.30A	6.8	5.0	Medium



G25

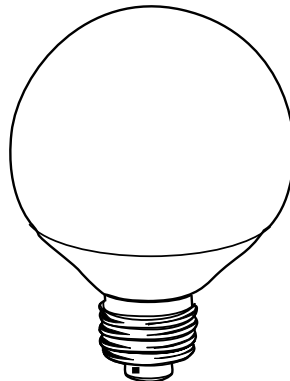

G30

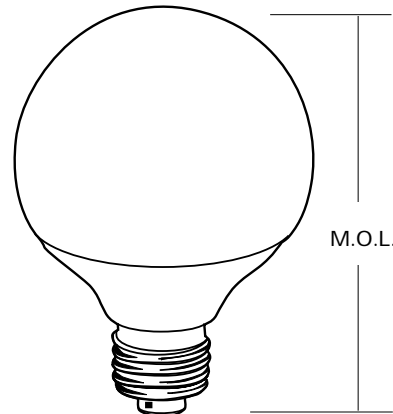





G40

Special Application

Options: (Ordering Suffix)

- 3100°K (31K), 3500°K (35K), 4100°K (41K), 5100°K (51K)

Applications:

 Use anywhere a standard incandescent is used

- Perfect for:
- Table lamps
 - Floor lamps
 - Ceiling fixtures
 - Wall Sconces
 - Closet lights
 - Vanity Strips

Features and Benefits:

- Long life, 8,000 hour average rated life
- Lasts 5 times longer than similar incandescent
- Replace less often, ideal for hard to reach places
- Lower maintenance costs for lamp replacements
- 2700°K color temperature closest to incandescent light
- Quick run-up time
- Medium base and compact height fits anywhere a standard incandescent fits
- Instant start, flicker free
- End of Life logic guards against violent failures
- World class phosphor insures high lumen output and excellent lumen maintenance

Specifications

End of Life Protection-----	Yes
Ballast Type -----	Electronic
Starting Method -----	Modified Rapid Start
Input Line Voltage -----	120VAC
Input Line Frequency -----	60HZ
Lamp Life (rated) -----	8,000 Hours
Color Temperature -----	2700°K
Color Rendering Index -----	84
Minimum Starting Temperature --	-20 ° F
Maximum Operating Temperature	160 ° F
U.L. / C.U.L. Listed -----	Yes
FCC Compliance -----	Part 18, Subpart C
Lamp Operating Frequency -----	45 KHZ
Lamp Current Crest Factor -----	< 1.60
Maximum Open Circuit Voltage --	600V
Power Factor -----	> .50
Total Harmonic Distortion -----	< 150%

SpringLamp® INSIDE technology provides:

- Higher lumen Output
- Long life - 8,000 hours average rated life
- Better lumen maintenance



ISO 9002 CERTIFIED

12 MONTH WARRANTY

TCP TECHNICAL CONSUMER PRODUCTS, INC.

Lighting the Way to Energy Efficiency

Purchase from www.goodmart.com
 PHONE: (877)402-6100
 FAX: (347) 402-6100
 E-MAIL: info@goodmart.com