




LED 25,000 Hours average rated life, 120 Volts



Applications:

Ideal for applications where uniform multi-directional light output is required.

- + Table Lamps
- + Floor Lamps
- + Sconces
- + Ceiling Fixtures

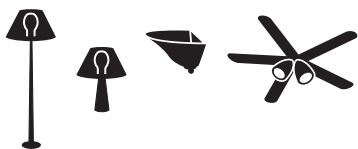


Features	Benefits
Up to 85% less energy than halogen alternatives	Instant energy savings
Smooth, uniform dimming	Set the perfect mood & atmosphere.
Long life	Minimizes replacement and maintenance costs
Smooth, clean outside housing	Seamlessly blends into lighting applications.
Very low heat generation	Perfect for sensitive display lighting such as art galleries.
Excellent Color Consistency and CRI	Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp.
UL approved for damp location	Can be used outdoors when protected from elements. Withstands humidity indoors/outdoors.
Shatter resistant	Lower the risk of injury and breakage
ANSI construction compliant	Fits all A-Lamp sockets

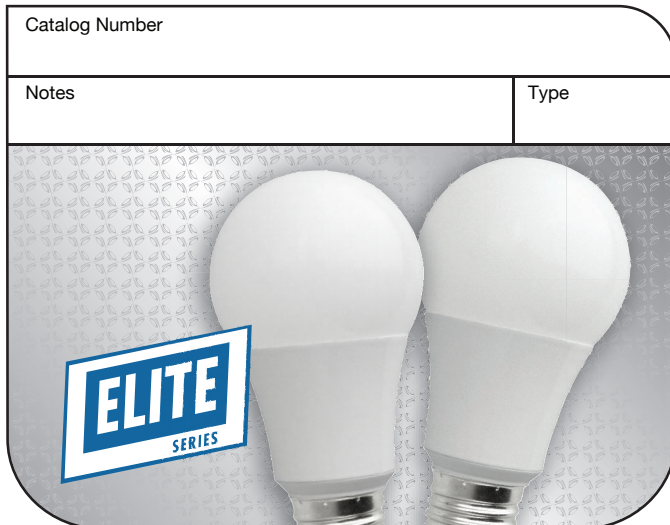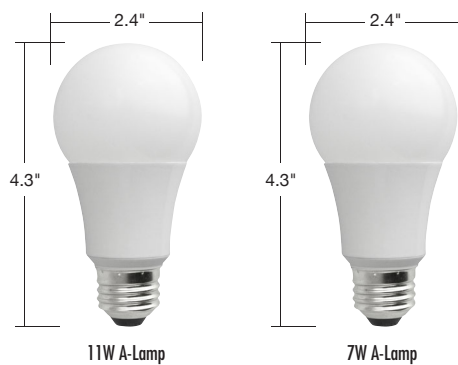

Specifications

Input Line Voltage:	120 VAC
Input Power	See Chart
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
CRI	82
Dimming	Yes



Warranties and Certifications:	Item #	Description	Voltage	Wattage	Incandescent Wattage Comparison	Lumens	LPW	CCT	CRI	M.O.L. (inches)	Diameter (inches)	Case Quantity	
 5 YEAR WARRANTY* <small>*Based on 12 hours use per day</small>	11W A-Lamp												
	LED11A19D24K	Dimmable 11W Smooth A19 - 2400K	120	11	60	800	72.7	2400K	82	4.3	2.4	12	
	LED11A19D27K	Dimmable 11W Smooth A19 - 2700K	120	11	60	800	72.7	2700K	82	4.3	2.4	12	
	LED11A19D30K	Dimmable 11W Smooth A19 - 3000K	120	11	60	850	77.3	3000K	82	4.3	2.4	12	
	LED11A19D41K	Dimmable 11W Smooth A19 - 4100K	120	11	60	900	81.8	4100K	82	4.3	2.4	12	
	7W A-Lamp												
	LED7A19D24K	Dimmable 7W Smooth A19 - 2400K	120	7	40	450	64.3	2400K	82	4.3	2.4	12	
	LED7A19D27K	Dimmable 7W Smooth A19 - 2700K	120	7	40	450	64.3	2700K	82	4.3	2.4	12	
	LED7A19D30K	Dimmable 7W Smooth A19 - 3000K	120	7	40	475	67.9	3000K	82	4.3	2.4	12	
	LED7A19D41K	Dimmable 7W Smooth A19 - 4100K	120	7	40	500	71.4	4100K	82	4.3	2.4	12	

