



3" HALOGEN

LOW PROFILE FIXED DOWNLIGHT

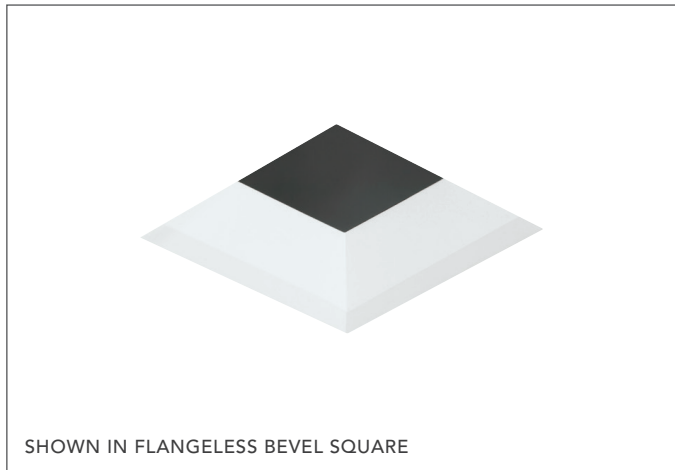

SMALL APERTURE DOWNLIGHT WITH ARCHITECTURAL APPEARANCE. 4" HEIGHT FOR SHALLOW CEILING INSTALLATIONS. UTILIZES THE SAME TRIMS AS THE STANDARD 3" HOUSING SO IT CAN BE USED IN THE SAME APPLICATION ONLY WHERE A SHALLOWER HOUSING IS REQUIRED.

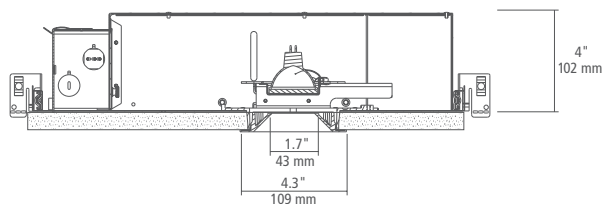

LAMPING & OPTICS

- Low-voltage Halogen MR16 (50W max)
- LED MR16 replacement lamps
- Accepts two optical controls in addition to one trim mounted lens
- Lamps and optical controls ordered separately

POWER / POWER SUPPLY

- Ships with 75 watt, 120V electronic or magnetic transformer or 60 watt no load electronic transformer per specification
- Remote transformer available (ordered separately)
- Dimming dependent on transformer, either low-voltage electronic (ELV) or magnetic (MLV)
- No load electronic transformer for use with LED MR16 replacement lamps (12 watt max)
- Power supplies can be accessed through the aperture

TRIMS

- Die cast aluminum with minimal thickness
- Available in flanged or flangeless ceiling appearance
- Lensed and shower aperture includes Solite™ soft focus lens at aperture
- White can be field painted to match adjacent finishes
- Accommodates up to 2.5" ceiling thickness, depending on trim

HOUSING

- Non-IC: 11.5" x 17.5" x 4"
- Constructed of heavy gauge cold rolled steel with durable matte black powder coat finish
- 3-7/8" ceiling opening, off-set
- Includes integral junction box approved for branch circuit through wiring
- ETL listed. Damp listed. Shower version wet listed.

INSTALLATION

- Includes adjustable hanger bars. Includes butterfly brackets that attach to the side of the housing and are vertically adjustable with a wing nut.
- Incorporates integral gunsights for positioning with laser level or string

WARRANTY

- 1-year


3" HALOGEN

ELEMENT-Lighting.com


LOW PROFILE FIXED DOWNLIGHT

TRIMS


ROUND

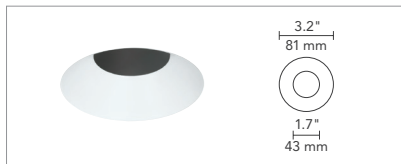


FLANGELESS BEVEL

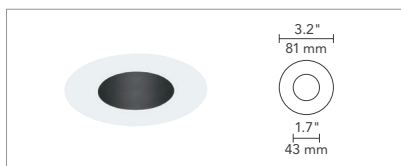

FLANGELESS FLAT

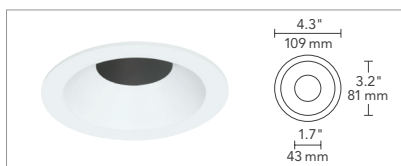


FLANGED BEVEL

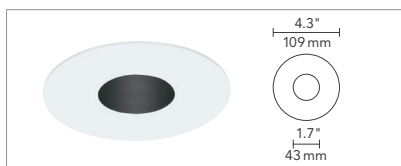


FLANGED FLAT


SQUARE

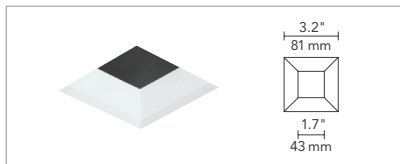


FLANGELESS BEVEL

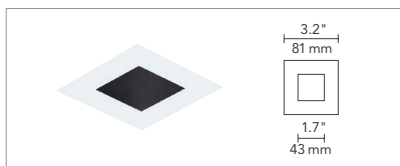

FLANGELESS FLAT

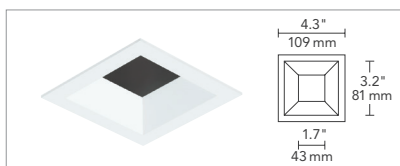

FLANGED BEVEL

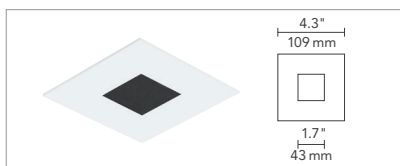

FLANGED FLAT

FINISH



ANTIQUE
BRONZE



BLACK




SATIN
NICKEL



WHITE
(PAINTABLE)

3" HOUSING

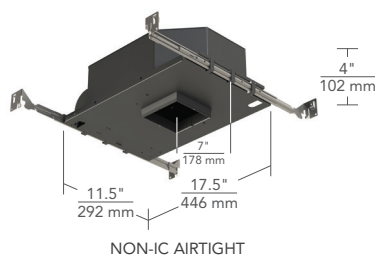

NON-IC AIRTIGHT

GENERATION BRANDS



2015 Tech Lighting, L.L.C. All rights reserved. The "Element" graphic is a registered trademark of Element. Element reserves the right to change specifications for product improvements without notification.

ELEMENT
by Tech Lighting®

7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400 F 847.410.4500

3" HALOGEN

LOW PROFILE FIXED DOWNLIGHT

GRIDS

HOUSING

PRODUCT SERIES	CEILING APPEARANCE	LAMP	FUNCTION	HOUSING RATING	TRANSFORMER	WATTAGE RESTRICTION	VOLTAGE
E3R ELEMENT 3" ROUND	LF FLANGELESS	-H HALOGEN MR 16 (50 WATT MAX)	D DOWN	S SHALLOW NON-IC AIRTIGHT	E ELECTRONIC M MAGNETIC R REMOTE N NO LOAD ELECTRONIC	NONE (LEAVE BLANK) -WR WATTAGE RESTRICTION*	120 VOLT (LEAVE BLANK) -277 277 VOLT
E3S ELEMENT 3" SQUARE	FF FLANGED						
_____ - H D S _____							

TRIMS ARE REQUIRED AND MUST BE ORDERED SEPARATELY. *TO INCLUDE WATTAGE RESTRICTION LABEL, SPECIFY -WR AT THE END OF THE HOUSING ITEM NUMBER AND SPECIFY WATTAGE (EXAMPLE: -WR37). ONLY AVAILABLE WITH HALOGEN MR16 LAMP.

TRIM

PRODUCT SERIES	CEILING APPEARANCE	TRIM STYLE	APERTURE	FINISH
E3R ELEMENT 3" ROUND	L FLANGELESS UP TO 1" CEILING THICKNESS F FLANGED UP TO 1" CEILING THICKNESS	B BEVEL F FLAT	-O NO LENS -H SHOWER -L LENSED	Z ANTIQUE BRONZE B BLACK S SATIN NICKEL W WHITE
E3S ELEMENT 3" SQUARE	F15 FLANGED 1.1"-1.5" CEILING THICKNESS F20 FLANGED 1.6"-2.0" CEILING THICKNESS F25 FLANGED 2.1"-2.5" CEILING THICKNESS			
_____ - _____				

PROJECT INFO

FIXTURE TYPE

FIXTURE QUANTITY

JOB NAME

NOTES
