

# 4" ELECTRONIC COMPACT FLUORESCENT CANS & TRIMS



GU24 Socket


## ICSC118AT/GU24/V4

### New Work 120V 11-18 Watt Vertical Mount GU24 CFL

- New Construction, IC applications, airtight applications
- Uses one ENERGY STAR qualified 120V 11-18 watt GU24 base CFL
- 90° adjustable telescoping bar hangers (13 5/8" - 25") with captive nails on flanges and notched for T-Bar ceilings
- Removable housing for J-box access
- Adjustable socket mounting plate for precise beam control
- Junction box with 1/2" KO's and ROMEX® pry-outs with strain reliefs
- Female quick connectors installed
- Listings: UL for Direct Contact with Insulation; UL Feed Through and UL Damp Locations
- ENERGY STAR qualified and meets TITLE 24 High Efficacy requirements
- UPC# 08985



**Meets TITLE 24  
High Efficacy  
Requirements.**

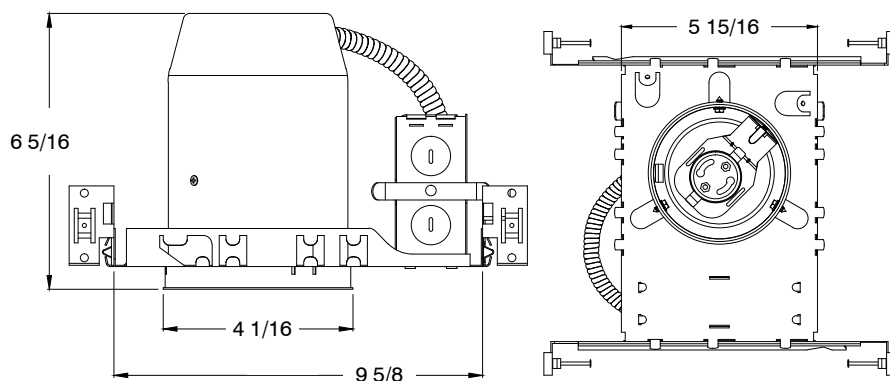

## TR840GU/DWB

White GU24 Trim  
with White Deep  
Stepped Baffle


- UPC# 09031



## TR841GU/DCR

White GU24 Trim  
with Clear Deep  
Reflector

- UPC# 09033

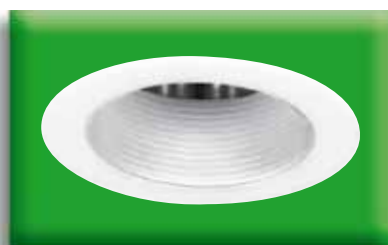

## TR834CL/WH

Clear Deep  
Reflector with  
White Baffle and  
White Ring

- UPC# 09028



## TR836

White Shower  
Trim with Frosted  
Lens, White Ring  
and Clear Deep  
Reflector

- UPC# 09029

For a complete listing of 4" compact fluorescent trims, see page 10.