


# INDUSTRIAL CEILING FANS

**SUMMER  
COOLING**

---

**WINTER  
HEAT  
RECOVERY**

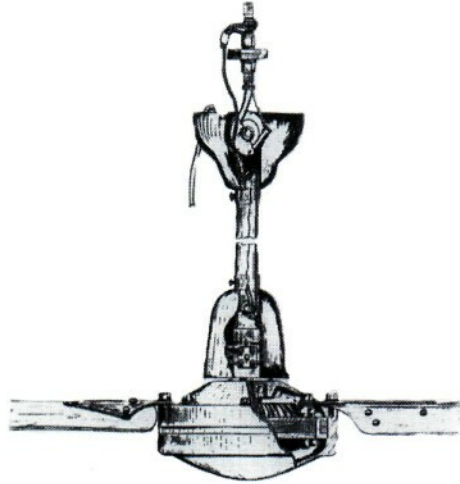

- All metal construction
- 18 Pole, 115 V, 1 Ph. Capacitor type, impedance protected motor with sealed ball bearings
- Mounts to 3/8" diameter steel J-hook
- White epoxy finish
- Aluminum paddles
- 18" Down rod standard, 24" or 36" down rods available
- UL Listed



## COMMERCIAL GRADE

- Assembly required
- 18" lead wires
- 1 Year Warranty
- Safety cable Included

## INDUSTRIAL GRADE

- Fully assembled except blade bolt down
- 3 Conductor cord, 4' long with plug
- Moisture / Dust resistant construction available as "DR option"
- 3 Year Warranty
- Safety cable included

## HEAVY DUTY GRADE

- Fully assembled except blade bolt down
- 3 Conductor cord, 6' long with plug
- Moisture / Dust resistant construction available as "DR option"
- 6 Year Warranty
- Safety cable included

Grade	Model	Type	Size	CFM	RPM	AMPS	Shipping Weight	List Price	
								Std. Model	- DR Option
Commercial	CHR-56	Down Draft	56"	19000	320	1.0	19	\$120	\$---
Industrial	IHR-48	Down Draft	48"	17000	320	.7	20	162	190
Industrial	IHR-56	Down Draft	56"	21000	310	.9	21	173	202
Industrial	IHR-56R	Reversable	56"	21000	310	.9	21	175	205
Industrial	IHR-56-277V*	Down Draft	56"	21000	310	.6	21	175	---
Heavy Duty	HDHR-56	Down Draft	56"	27500	320	1.1	17	225	255
Heavy Duty	HDHR-56WR	Water Resistant	56"	27500	320	1.1	17	245	---
Heavy Duty	HDHR-60	Down Draft	60"	47000	320	1.1	18	255	285
Heavy Duty	HDHR-60WR	Water Resistant	60"	47000	320	1.1	18	285	---

\* 277 volts - lead wires instead of cordset

## SOLID STATE CONTROLS

MODEL	TYPE	AMPS	LIST
HR-SS-2	1-2 FANS SPEED CONTROL	3 MAX.	\$27
HR-SS-5	3-5 FANS SPEED CONTROL	6 MAX.	80
HR-SS-10	6-10 FANS SPEED CONTROL	12 MAX.	120
HR-SS-5R	1-5 FANS REVERSING SWITCH	6 MAX.	20
HR-SS-10R	1-10 FANS REVERSING SWITCH	12 MAX.	28

## OPTIONS

MODEL	TYPE	LIST
HR-GUARD	FOR 56" MODELS	\$395
Suffix - X2	24" DOWN ROD OPTION	+ 15
Suffix - X3	36" DOWN ROD OPTION	+ 19

