


Sliver Low Voltage Halogen

7865

Adjustable

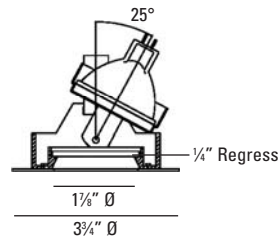

For trimless application add 325CCR

LUMINAIRE INFORMATION

APPLICATION:

Accent luminaire for Residential, Commercial, Retail or Hospitality environments.

MATERIALS:

Trim: Die cast aluminum / steel. Torsion spring mounting.
Lens: Clear.

LAMP: (not included) When using IR lamps, 37W Max.
(1) 50W max. MR16 GU5.3

TRANSFORMER:

Low voltage solid state electronic.
Note: Due to transformer / dimmer match some dimmers may cause transformer hum. Check with dimmer manufacturer for suitability.

ADJUSTMENT:

360° horizontal and 25° vertical tilt. 40° tilt available, consult factory.

VOLTAGE:

Specify 120V or 277V.

CEILING CUT OUT:

3 3/8" Ø

LISTINGS:


Dry/damp/wet under covered ceiling.
Not wet listed for flush (325CCR) installation.



IC/Airtight housing meets Washington state airflow requirement and ASTM E283.
IBEW union made.


NOTES:

- Maximum ceiling thickness 1 inch. Consult factory for other ceiling conditions.
- Maximum 2 lens options (size B).
- Use 325CCR trimless adapter for a smooth flush Sliver installation.




PHOTOMETRICS:

Distribution chart



LTN No.: 13823.ies
50W MR16 GU5.3 40° (tilted 25°)
Clear lens
54.8% Efficiency

HOUSING INFORMATION

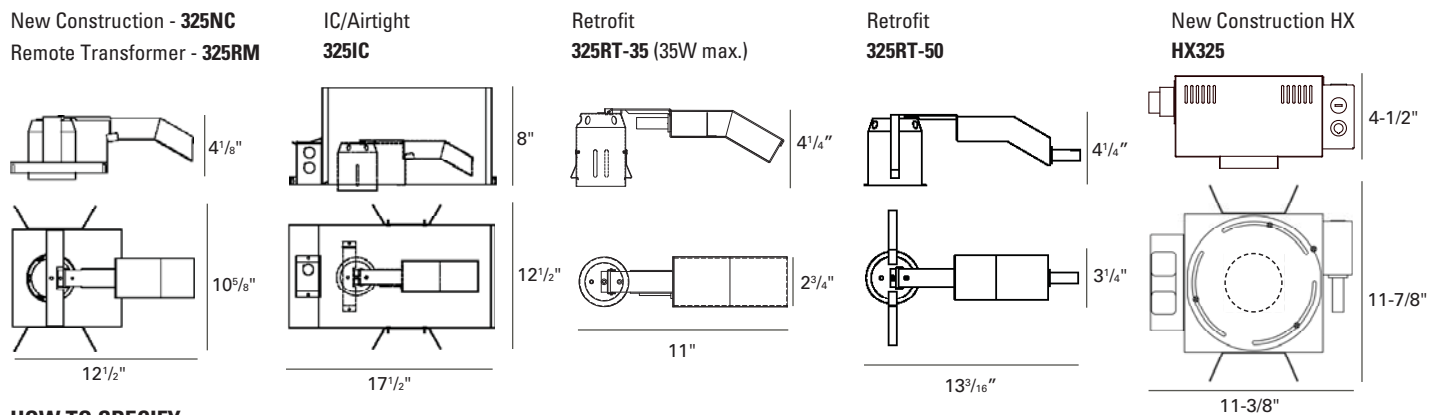

HOW TO SPECIFY

| Trim | Finish | Use "HX" for HX Housing | Housing | Voltage | Accessories |
|--|--|---|--|--------------|--|
| 7865 | | | | | |
| 7865 Sliver Adjustable, 50W Max. MR16 GU5.3 | 10 - White 12 - Brushed Stainless Steel 21 - Black 22 - Textured White 28 - Metalized Grey | HX Only specify HX here when specifying HX Housing | 325NC - New Construction 325IC - IC/Airtight 325RM - Remote Transformer 325RT-35 - Retrofit (35W max.) 325RT-50 - Retrofit HX325 - Trimmed version - If using adjustable trim, note that 40° max tilt and compatible with up to 5/8" thick ceiling max. HX325FLR - Trimless Round - If using adjustable trim, note that 25° max tilt and compatible with up to 1" thick ceiling max. | 120V 277V | 8177B - Hex Cell Louver 9143B - Frosted Lens 9153B - Anti UV Filter 9155B - Linear Spread Lens 9156B - Prismatic Spread Lens 9157B - Solite Lens 9199B - Frosted Borosilicate Lens ER - Emergency Relay 325CCR - Trimless Adapter * *Not needed when ordering HX housings |