

400W S51

High Pressure Sodium

V90D1912

60 Hz CWA

Input Volts	120	208	240	277
Line Current (Amps)				
Operating	3.80	2.20	1.90	1.70
Open Circuit	1.50	0.85	0.75	0.65
Starting	3.70	2.15	1.85	1.60
Regulation				
Line Volts	±10%	±10%	±10%	±10%
Lamp Watts	±13%	±13%	±13%	±13%
UL Temperature Ratings				
Insulation Class	H	H	H	H
Coil Temperature Code	C	C	D	C
Benchtop Coil Rise	83.8	84.2	85.9	82.3
Input Watts	460 W	460 W	460 W	460 W
NOM. Open Circuit Voltage	195	195	195	195
Power Factor	90%	90%	90%	90%
Current Crest Factor	1.60	1.60	1.60	1.60
Input Voltage At Lamp Dropout	90	155	180	205
MIN. Ambient Starting Temp.	-40°F -40°C	-40°F -40°C	-40°F -40°C	-40°F -40°C
60 HZ TEST PROCEDURES				
High Potential Test (Volts)				
1 Minute	1,600 V	1,600 V	1,600 V	1,600 V
1 Second	2,000 V	2,000 V	2,000 V	2,000 V
Open Circuit Voltage Test (V)	175 - 215	175 - 215	175 - 215	175 - 215
Short Circuit Current Test (A)				
Secondary Current	Min	6.25	6.25	6.25
Max	7.65	7.65	7.65	7.65
Input Current	Min	3.00	1.70	1.50
Max	4.50	2.60	2.25	1.95
Recommended Fuse (Amps)	10	7	6	5
CORE and COIL Specifications				
Dimension (A)	2.30 in	2.30 in	2.30 in	2.30 in
Dimension (B)	4.20 in	4.20 in	4.20 in	4.20 in
Weight (lbs.)	14.0 lb's	14.0 lb's	14.0 lb's	14.0 lb's
Lead Lengths	12 "	12 "	12 "	12 "
CAPACITOR Specifications				
Microfarads	55.0 uf	55.0 uf	55.0 uf	55.0 uf
Volts (min.)	240 V	240 V	240 V	240 V


Ordering Information Add Suffix for options

- C - With Capacitor
- K - With Capacitor and Bracket Kit
- B - With Welded Bracket no cap

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice

1/2/01 Production

4X4 CORE - HX, CWA & CWI UNITS

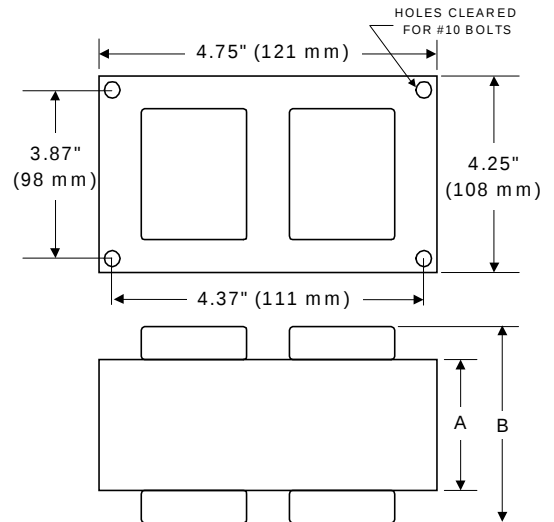


Capacitor: ACG255

Temp Rating: 100 °C
Height: 4.87 in
Dia/Oval Dim 1.75 in

Ignitor: BVS-005-A

Temp: 105 °C
BTL: 2 ft



Plastic Dry Film Capacitor

