

# 175W M57


**Metal Halide**

**V90Y6111**

**60 Hz CWA**

Input Volts	480				
Line Current ( Amps )					
Operating	0.45				
Open Circuit	0.35				
Starting	0.30				
Regulation					
Line Volts	±10%				
Lamp Watts	±7%				
UL Temperature Ratings					
Insulation Class	H				
Coil Temperature Code	B				
Benchtop Coil Rise	79.2				
Input Watts	211 W				
NOM. Open Circuit Voltage	320				
Power Factor	90%				
Current Crest Factor	1.70				
Input Voltage At Lamp Dropout	240				
MIN. Ambient Starting Temp.	-20°F -30°C				
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V				
1 Second	2,400 V				
Open Circuit Voltage Test (V)	285 - 355				
Short Circuit Current Test (A)					
Secondary Current	Min 1.55				
	Max 1.95				
Input Current	Min 0.25				
	Max 0.45				
Recommended Fuse (Amps)	2				
CORE and COIL Specifications					
Dimension (A)	2.22 in				
Dimension (B)	3.60 in				
Weight (lbs.)	6.8 lb's				
Lead Lengths	12 "				
CAPACITOR Specifications					
Microfarads	10.0 uf				
Volts (min.)	400 V				

## 3X4 CORE - HX, CWA & CWI UNITS

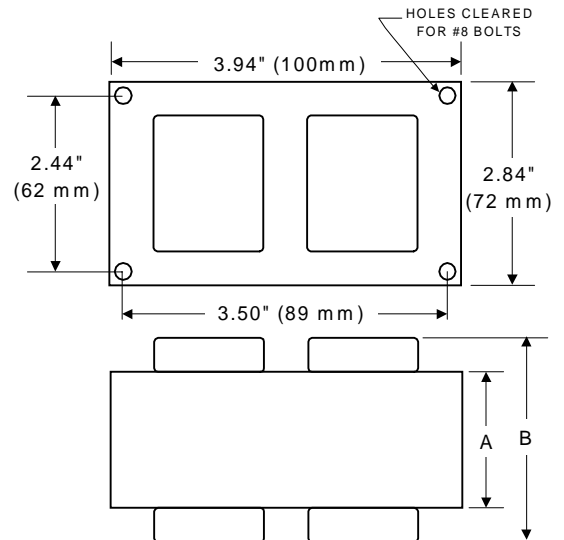


**Capacitor: ACH279**

**Ignitor: None**

Temp Rating: 100 °C

Height: 3.69 in

Dia/Oval Dim 1.61 in

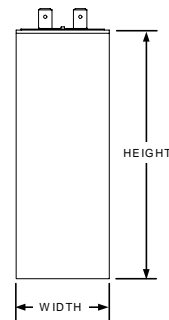

Dry Film Capacitor with Terminals

## Ordering Information Add Suffix for options

- C - With Capacitor
- K - With Capacitor and Bracket Kit
- B - With Welded Bracket no cap

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice

**3/27/01**

**Production**

