

250W M58


Metal Halide

V90Y6212T

60 Hz CWA

Input Volts	480				
Line Current (Amps)					
Operating	0.63				
Open Circuit	0.55				
Starting	0.50				
Regulation					
Line Volts	±10%				
Lamp Watts	±10%				
UL Temperature Ratings					
Insulation Class	H				
Coil Temperature Code	B				
Benchtop Coil Rise					
Input Watts	295 W				
NOM. Open Circuit Voltage	305				
Power Factor	90%				
Current Crest Factor	1.70				
Input Voltage At Lamp Dropout	210				
MIN. Ambient Starting Temp.	-20°F -30°C				
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V				
1 Second	2,400 V				
Open Circuit Voltage Test (V)	275 - 335				
Short Circuit Current Test (A)					
Secondary Current	Min 2.20				
	Max 2.70				
Input Current	Min 0.35				
	Max 0.55				
Recommended Fuse (Amps)	2				
CORE and COIL Specifications					
Dimension (A)	1.55 in				
Dimension (B)	3.35 in				
Weight (lbs.)	8.8 lb's				
Lead Lengths	12 "				
CAPACITOR Specifications					
Microfarads	15.0 uf				
Volts (min.)	400 V				

4X4 CORE - HX, CWA & CWI UNITS

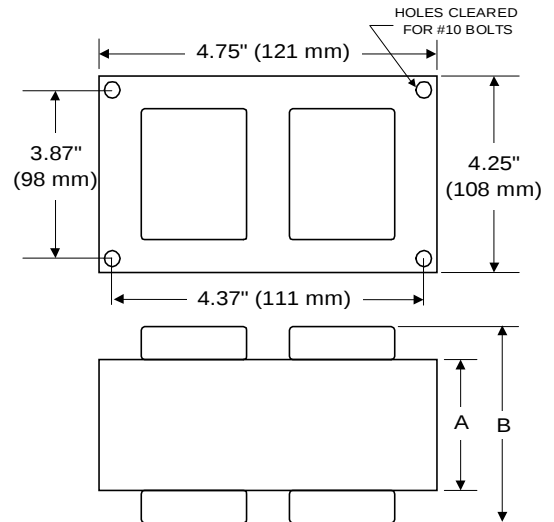


Capacitor: ACH277

Ignitor: None

Temp Rating: 100 °C

Height: 3.69 in

Dia/Oval Dim 1.80 in



Dry Film Capacitor with Terminals

Ordering Information Add Suffix for options

- C - With Capacitor
- K - With Capacitor and Bracket Kit
- B - With Welded Bracket no cap

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice

11/2/01

Production

