

1500W M48


Metal Halide

V90Y6612T

60 Hz CWA

Input Volts	480				
Line Current (Amps)					
Operating	3.40				
Open Circuit	1.65				
Starting	3.00				
Regulation					
Line Volts	±10%				
Lamp Watts	±12%				
UL Temperature Ratings					
Insulation Class	H				
Coil Temperature Code	E				
Benchtop Coil Rise	92.5				
Input Watts	1625 W				
NOM. Open Circuit Voltage	450				
Power Factor	90%				
Current Crest Factor	1.65				
Input Voltage At Lamp Dropout	265				
MIN. Ambient Starting Temp.	-20°F -30°C				
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V				
1 Second	2,400 V				
Open Circuit Voltage Test (V)	405 - 495				
Short Circuit Current Test (A)					
Secondary Current	Min 7.20				
	Max 8.80				
Input Current	Min 2.40				
	Max 3.60				
Recommended Fuse (Amps)	10				
CORE and COIL Specifications					
Dimension (A)	4.20 in				
Dimension (B)	6.20 in				
Weight (lbs.)	31.0 lb's				
Lead Lengths	12 "				
CAPACITOR Specifications					
Microfarads	32.0 uf				
Volts (min.)	525 V				


4X6 CORE - HX, CWA & CWI UNITS

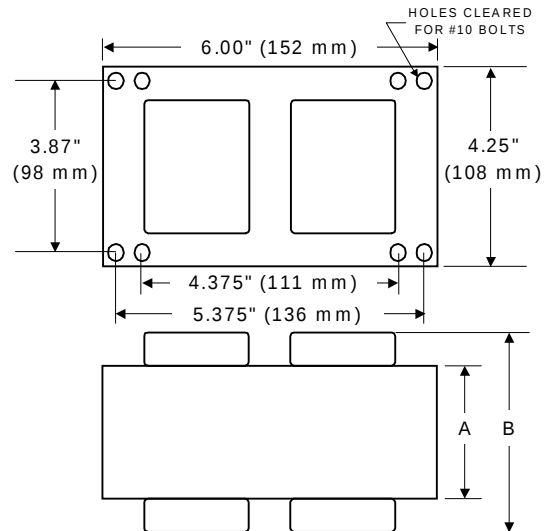

Capacitor: ACB2560V

Ignitor: None

Temp Rating: 90 °C
Height: 4.44 in
Dia/Oval Dim 2.03 in
Width 3.72



Ordering Information Add Suffix for options

- C - With Capacitor
- K - With Capacitor and Bracket Kit
- B - With Welded Bracket no cap

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice

12/4/00

Production

