


320W M132 / M154
Pulse Start Metal Halide
V90Y7411T
60 Hz CWA

Input Volts	480				
Line Current (Amps)					
Operating	0.80				
Open Circuit	0.40				
Starting	0.60				
Regulation					
Line Volts	±10%				
Lamp Watts	±10%				
UL Temperature Ratings					
Insulation Class	H				
Coil Temperature Code	D				
Benchtop Coil Rise	85.9				
Input Watts	368 W				
NOM. Open Circuit Voltage	265				
Power Factor	90%				
Current Crest Factor	1.60				
Input Voltage At Lamp Dropout	320				
MIN. Ambient Starting Temp.	-40°F -40°C				
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V				
1 Second	2,500 V				
Open Circuit Voltage Test (V)	235 - 295				
Short Circuit Current Test (A)					
Secondary Current	Min 3.00				
	Max 3.60				
Input Current	Min 0.45				
	Max 0.75				
Recommended Fuse (Amps)	3				
CORE and COIL Specifications					
Dimension (A)	1.90 in				
Dimension (B)	3.75 in				
Weight (lbs.)	10.5 lb's				
Lead Lengths	12 "				
CAPACITOR Specifications					
Microfarads	22.0 uf				
Volts (min.)	330 V				

4X4 CORE - HX, CWA & CWI UNITS

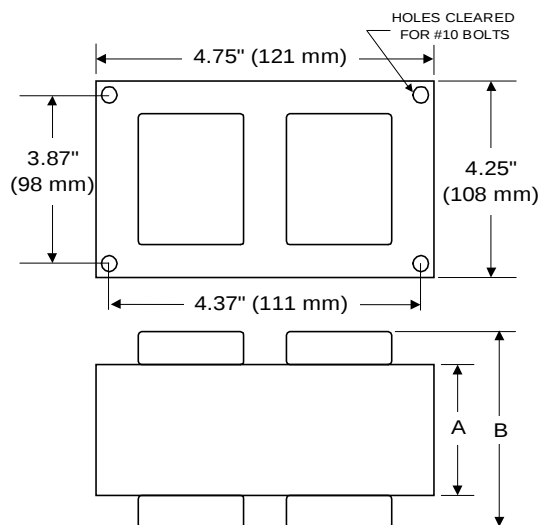


Capacitor: ACG306


Temp Rating: 100 °C
Height: 3.92 in
Dia/Oval Dim 1.60 in

Ignitor: BVS-041

Temp: 105 °C
BTL: 2 ft



Plastic Dry Film Capacitor



Ordering Information Add Suffix for options

- C - With Capacitor
- K - With Capacitor and Bracket Kit
- B - With Welded Bracket no cap

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice

This unit contains an aluminum winding. Consult factory for details

3/11/02

Production

