
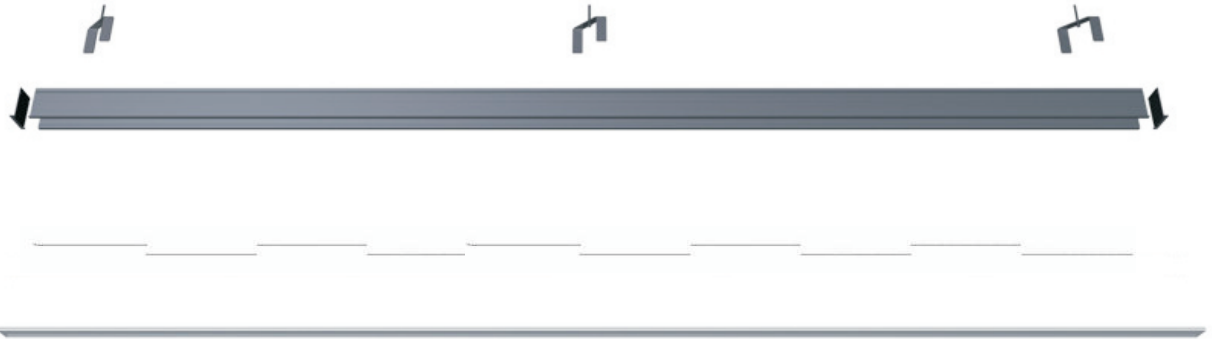


Date: _____ Project: _____

Fixture Type: _____ Specifier/Rep: _____

Please use part number L36149__ when specifying this product.



Certified by  for North American Standards

APPLICATION

Recessed

CONSTRUCTION

Fixture Material: Aluminum

Fixture Finish:

21 Different Colors and combinations

Other Available Finish Options:

See page 3

ELECTRICAL:

Lamp Category: LED

Power Supply:

Remote

Voltage: 120V

(277V available upon request)

Emergency: N/A

IP RATING:

IP20

OPTICS:

Diffuser Material:

Acrylic

Efficiency:













Acrylic - 32%

PRODUCT FEATURES:

Direct light distribution

For assistance to write your "custom" specification, email your inquiry to: specification@zaneen.com.
Zaneen's Specification Team will respond within 1-2 business days.

COMPONENTS



		Length	Model Number			Length	Model Number
	Please use part number L36149__ when specifying this product. Aluminum Profile W. 58mm x Ht. 68mm (W. 2 5/16" x Ht. 2 11/16")	per meter	L36149__				
				max. 3000mm lengths Note: cutout width is 50mm (1 15/16")			
	Opal Diffuser	per meter	L3951200				
				max. 3000mm lengths			
	Aluminum Cap Profile	per meter	L39501__				
				max. 3000mm lengths			
	End Cap		L39008__				
					Coupler		L3901200
					Corner Coupler - 90°		L3900300
					Corner Required Angle - 45° - 180°		L3900400
					Mounting Bracket		L3901100
							

Date: _____ Project: _____

Fixture Type: _____ Specifier/Rep: _____

LED OPTIONS & POWER SUPPLIES

LED INSERTS

		Length mm (inches)	Wattage ¹	Model Number	Lumens ²	Color Temperature (K) ³	
	LED 1	152mm (6")	4.5W	L3966300	396lm	3000K	

1: All information above is based on 6" increments. For example, a 2' length, would multiply the wattage and lumens by 4 to get overall wattage and lumen values.

2: The lumens value does not change regardless of the length of the runs.





3: Please contact Zaneen for other color temperature options

POWER SUPPLIES (remote)







		Max Wattage	Voltage	Model Number
	POWER 1	20W	24Vdc	DR02024V
	POWER 2	50W	24Vdc	DR05024V
	POWER 3	75W	24Vdc	DR07524V
	POWER 4	100W	24Vdc	DR10024V
	POWER 5	150W	24Vdc	DR15024V
	POWER 6	200W	24Vdc	DR20024V
	POWER 7	300W	24Vdc	DR30024V

OPTIONS

HALOGEN INSERTS

		Length mm (inches)	Lamp	Model Number	
	SPOT 1	350mm (13 3/4")	1 x 35W MR11	L3906000	
	SPOT 2	400mm (15 3/4")	2 x 20W MR11	L3906200	

SPOT LED INSERTS

		Diameter mm (inches)	LED	Wattage ⁵	Color Temperature (K)	Beam Angle		
	LED RIGEL ⁴ (Non-Adjustable)	30mm (1 3/16")	L4RI003J L4RI001J L4RI005J L4RI004J L4RI002J L4RI006J	1-2W 1-2W 1-2W 1-2W 1-2W 1-2W	3000K 3000K 3000K 4000K 4000K 4000K	16° 40° Diffused Optics 16° 40° Diffused Optics		
	LED ADHARA ⁴ (25° Adjustable Spot)	40mm (1 9/16")	L4AD003J L4AD001J L4AD005J L4AD004J L4AD002J L4AD006J	1-2W 1-2W 1-2W 1-2W 1-2W 1-2W	3000K 3000K 3000K 4000K 4000K 4000K	16° 40° Diffused Optics 16° 40° Diffused Optics		

4: For 2 LED requirement, please order quantity of 2 inserts

5: For 1W, LED is @ 350mA; For 2W, LED is @ 500mA

Date: _____ Project: _____

Fixture Type: _____ Specifier/Rep: _____



AVAILABLE IN THE FOLLOWING FINISH OPTIONS*

(finish appearance may not be exact due to computer settings)



natural anodized aluminum

00

sparkling silver RAL9006FS

01

black velvet RAL9005FS

02

crystal white RAL 9016FS

03

creamy

04

hampton bay

05

lagoon

06

urban forest

07

in the army


08

rusty angel

09

rusty rush

10

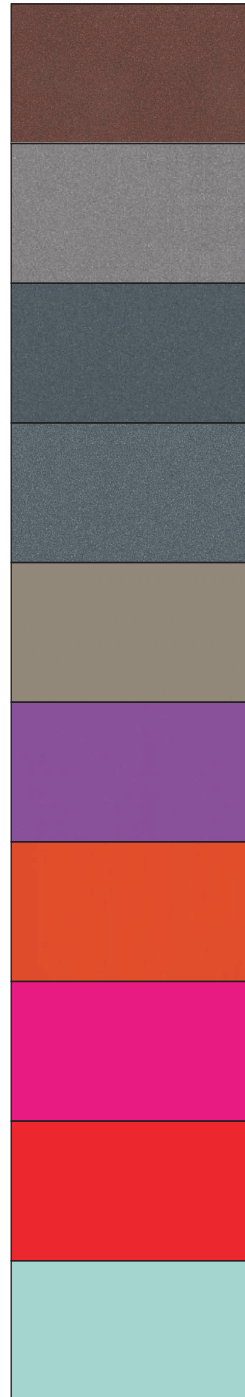

milk & chocolate

11

fade to gray

12

mysterious gray

13

twilight

14

lost dream

15

purple sky

16

fresh Oh

17

funky P.

18

kissing aphrodite

19

poseidon's paradise

20

**All finishes are extra charge except for "natural anodized aluminum 00" finish*