

type :




BFL282

LINEAR T5 FLUORESCENT

low profile linear T5 fluorescent two lamp top mount architectural fixture with integral ballast

SPECIFICATIONS

- Fully assembled housing is formed and welded, 20 ga. steel, chemically treated to resist corrosion and enhance paint adhesion
- Standard finish is high reflectance white powder coat, applied post production
- Knock-outs accept standard electrical fittings (by others)
- Rotational locking lamp holders
- Available for two T5 8W, 13W, 14W, 21W, 28W, 35W and high output 24W, 39W, 54W, 80W linear fluorescent lamps
- Standard 120V or 277V electronic high power factor ballast is pre-wired to the lamp holders (consult factory for other voltage options)
- Dimming ballast and emergency battery back up options available (**consult factory for availability and system compatibility**)
- UL and C-UL listed for dry and damp locations
- IBEW

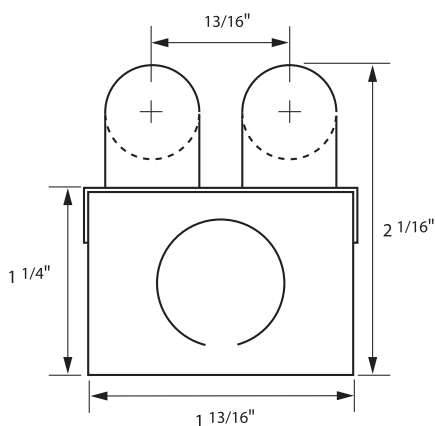

SPECIFICATION/ORDER FORMAT

catalog no.	voltage	options
BFL282-8	/120	Dimming –
BFL282-13	/277	(consult factory or power supply section for catalog number)
BFL282-14	(consult factory for other voltages)	
BFL282-21		Emergency Ballast –
BFL282-28		(consult factory or power supply section for catalog number)
BFL282-35		/DL - damp location
BFL282-24		/CU - custom finish
BFL282-39		(consult factory)
BFL282-54		
BFL282-80		

DIMENSION INFORMATION

lamp	O.A. length
2 x 8w T5	12 3/16"
2 x 13w T5	21 1/4"
2 x 14w T5	22 1/2"
2 x 21w T5	34 1/4"
2 x 28w T5	46 1/16"
2 x 35w T5	57 15/16"
2 x 24w T5 HO	22 1/2"
2 x 39w T5 HO	34 1/4"
2 x 54w T5 HO	46 1/16"
2 x 80w T5 HO	57 15/16"



tel 714.230.3200 fax 714.230.3222


bartcoLIGHTING.com

products subject to change without notice.

BFL282

ACCESSORIES

REFLECTORS

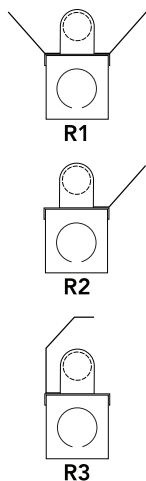

Standard finish on all reflectors is high reflectance white powder coat

- ▶ 282-R1-6 Symmetrical Reflector For BFL282-6
- ▶ 282-R1-8 Symmetrical Reflector For BFL282-8
- ▶ 282-R1-13 Symmetrical Reflector For BFL282-13
- ▶ 282-R1-14 Symmetrical Reflector For BFL282-14
- ▶ 282-R1-21 Symmetrical Reflector For BFL282-21
- ▶ 282-R1-28 Symmetrical Reflector For BFL282-28
- ▶ 282-R1-35 Symmetrical Reflector For BFL282-35
- ▶ 282-R1-24 Symmetrical Reflector For BFL282-24
- ▶ 282-R1-39 Symmetrical Reflector For BFL282-39
- ▶ 282-R1-54 Symmetrical Reflector For BFL282-54
- ▶ 282-R1-80 Symmetrical Reflector For BFL282-80
- ▶ 282-R2-6 Asymmetrical Reflector For BFL282-6
- ▶ 282-R2-8 Asymmetrical Reflector For BFL282-8
- ▶ 282-R2-13 Asymmetrical Reflector For BFL282-13
- ▶ 282-R2-14 Asymmetrical Reflector For BFL282-14
- ▶ 282-R2-21 Asymmetrical Reflector For BFL282-21
- ▶ 282-R2-28 Asymmetrical Reflector For BFL282-28
- ▶ 282-R2-35 Asymmetrical Reflector For BFL282-35
- ▶ 282-R2-24 Asymmetrical Reflector For BFL282-24
- ▶ 282-R2-39 Asymmetrical Reflector For BFL282-39
- ▶ 282-R2-54 Asymmetrical Reflector For BFL282-54
- ▶ 282-R2-80 Asymmetrical Reflector For BFL282-80
- ▶ 282-R3-6 Inside Asymmetrical Reflector For BFL282-6
- ▶ 282-R3-8 Inside Asymmetrical Reflector For BFL282-8
- ▶ 282-R3-13 Inside Asymmetrical Reflector For BFL282-13
- ▶ 282-R3-14 Inside Asymmetrical Reflector For BFL282-14
- ▶ 282-R3-21 Inside Asymmetrical Reflector For BFL282-21
- ▶ 282-R3-28 Inside Asymmetrical Reflector For BFL282-28
- ▶ 282-R3-35 Inside Asymmetrical Reflector For BFL282-35
- ▶ 282-R3-24 Inside Asymmetrical Reflector For BFL282-24
- ▶ 282-R3-39 Inside Asymmetrical Reflector For BFL282-39
- ▶ 282-R3-54 Inside Asymmetrical Reflector For BFL282-54
- ▶ 282-R3-80 Inside Asymmetrical Reflector For BFL282-80

TUBE GUARD

▶ TG

Tube Guard (*sold by the foot*)

____ft

T5

architectural LIGHTING