


Data and specifications subject to change without notice

Project name	Type
Order number	
Date	

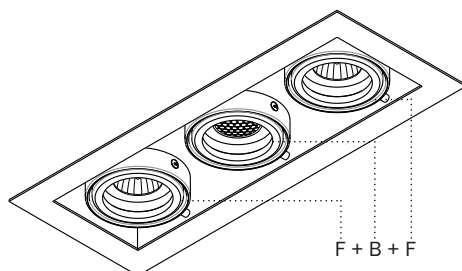


Shown with lamp types F + B

MX3-COMBO


MR16/PAR20/AR70/MR16 GX10 CMH/PAR20 CMH

SPECIFICATIONS

The Matrix is a multiple adjustable recessed downlight designed for a variety of different lamp types. Suitable for retail applications or any areas where clusters of various lamp types are required. Lamp combinations are available with any lamps listed below.

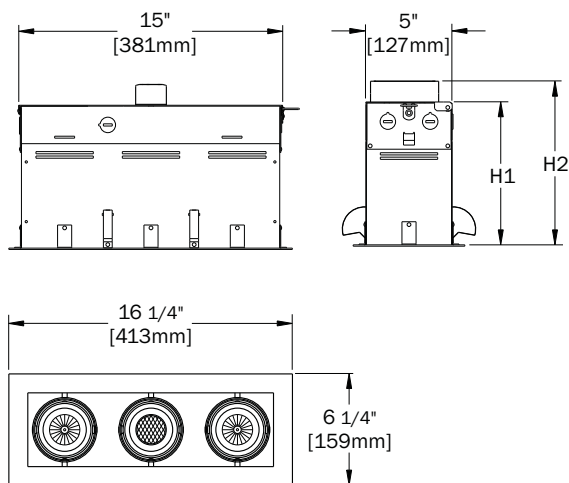

- ◆ Adjustable downlight for effective use in retail environments
- ◆ Unique clamping mechanism securely fastens the luminaire into place
- ◆ Lamp sits in a free floating cradle adjustable on a dual axial system which allows for a full 360° adjustability in the horizontal direction and up to 30° adjustability in the vertical direction
- ◆ Each lamp is independently adjustable and are suitable to accept an optional glass lens (if required)
- ◆ Metal halide lamps (by others) are powered by integrally mounted electronic ballasts.
- ◆ Low voltage lamps (by others) are powered by integrally mounted electronic low voltage transformers
- ◆ Non electrical baseplate assemblies are available for shipping in advance with 16" hanger bars and a safety cable for luminaire mounting
- ◆ Approved for non I/C ceiling types including air handling plenums, plaster, gypsum board and accoustical ceiling tiles
- ◆ Lamp location listed

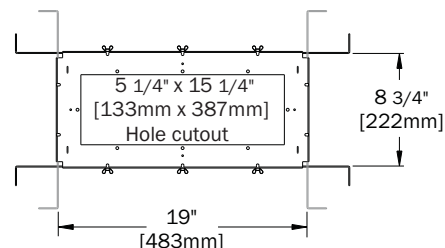

Baseplate detail

Item	Wattage	Ballast Location	Overall Height
H1	20/50/75W	Integral	8 1/4" [210mm]
H2	39W	External	9 1/2" [241mm]

ORDER GUIDE

TYPE	LAMP TYPE	VOLTAGE	FLANGE FINISH ¹	OPTION ²
MX3	A - 20W MR16 GX10-CMH B - 39W MR16 GX10-CMH C - 39W PAR20 CMH D - 50W PAR20 HALOGEN ⁴ E - 50W AR70 HALOGEN F - 75W MR16 HALOGEN	120 277 347 ³	01 - White 04 - Black 05 - Matte Silver 06 - Bronze 11 - Matte Nickel CC - Custom Color	MX3-BP-SM-Baseplate

Note:

- 1) Inner box and lamp holders painted matte black (for alternate color, consult factory)
- 2) Non electrical baseplate is available and can be shipped prior to luminaire
- 3) Consult factory for ballast availability
- 4) Only available in 120V

Luminaire Example: MX3-F-B-F-120-01
Baseplate Example: MX3-BP-SM

*Spec sheets are subject to change without notice