



# Heavy Duty Emergency Lighting Specification

## Features


- Compact, low profile design in a neutral finish
- Push to test switch
- 6-Volt, pure lead, maintenance-free battery with 10-year expected life
- Environmentally-coated, solid state charger
- Automatic, low voltage disconnect (LVD)
- Universal transformer for 120 or 277 VAC operation
- Standard with two fully adjustable, glare-free lighting heads
- Charge rate/power on LED indicator light
- Suitable for indoor applications only




## Ordering Information

Item #	Description	Watts	Volts
20775	50 Watt 6V Heavy Duty Emergency Light Unit w/Remote Capacity	50	6
20776	50 Watt 12V Heavy Duty Emergency Light Unit w/Remote Capacity	50	12
20777	50 Watt 12V Heavy Duty Emergency Light Unit w/Remote Capacity	50	12
20778	100 Watt 6V Heavy Duty Emergency Light Unit w/Remote Capacity	100	6
20779	100 Watt 12V Heavy Duty Emergency Light Unit w/Remote Capacity	100	12


6 Volt Incandescent 7.2 Watt

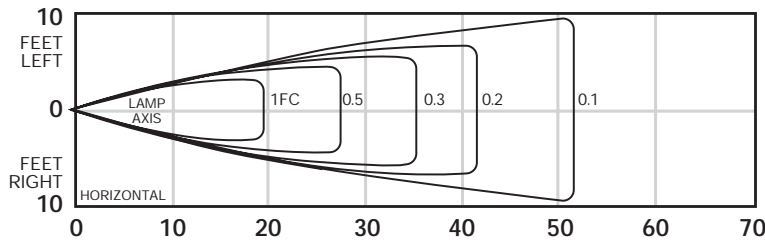


12 Volt Incandescent 12 Watt

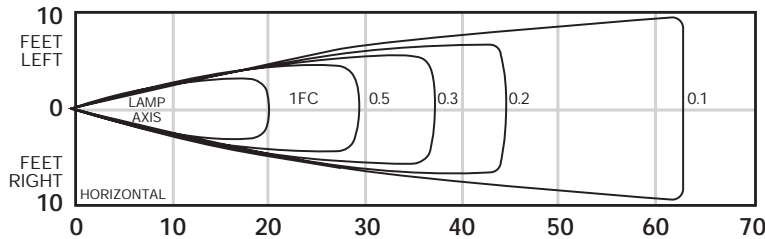

50 Watt Models

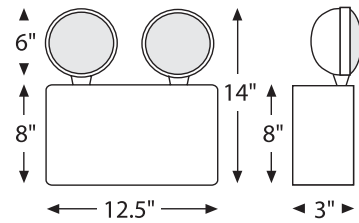

100 Watt Models

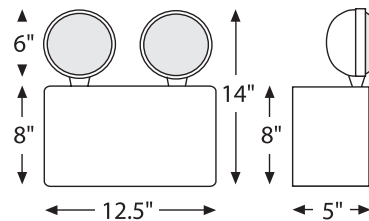

## Specifications

6 Volt Emergency Lighting Units with Remote Capability						
Catalog Model #	Watts for 1-1/2 hrs	Voltage	Total Connected Heads / Fixtures (based on 9 watt lamps)			Warranty
			4-hrs	2-hrs	1-1/2-hrs	
20775	50	6	2	4	6	Yes
20778	100	6	3	6	10	Yes
12 Volt Emergency Lighting Units with Remote Capability						
Catalog Model #	Watts for 1-1/2 hrs	Voltage	Total Connected Heads / Fixtures (based on 12 watt lamps)			Warranty
			4-hrs	2-hrs	1-1/2-hrs	
20776	50	12	-	3	5	Yes
20779	100	12	3	6	8	Yes

## Accessories

Item #	Description
207R1	Single WH Remote Head 5.4W 6V
207R2	Double WH Remote Head 5.4W 6V
207R3	Single Grey Remote Waterproof Head 5.4W 6V
207R4	Double Grey Remote Waterproof Head 2 X 5.4W 6V
20737	Replacement Battery for 2077 Series 50W 6V 4.5Ah
20738	Replacement Battery for 2077 Series 100W 6V 12Ah