


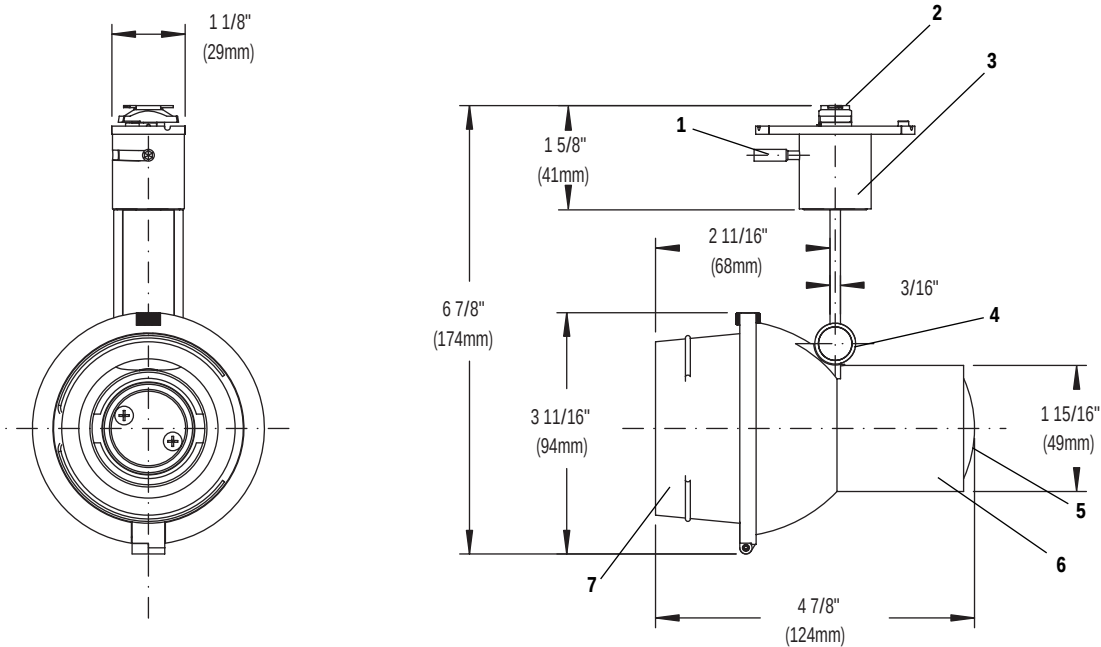

Ordering Information

Catalog No.	Finish	Mounting	Lamps
22SS2WH 22SS2BK 22SS2AL	Matte White Matte Black Metallic Aluminum	All Lytespan Track Systems. Does not mount on ProSpec Track.	PAR20 50W Max.

Features

- Track Attachment Fitting:** Locking lever for mechanical/electrical connection
- Brass Contact:** Extends for connection to second circuit (Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Porcelain socket, medium base, nickel-plated screw shell
- Housing:** Die cast aluminum
- Accessory Cartridge:** Hinged and captive; retaining ring included.

Finish

All Painted finishes are baked enamel.

Dimming

Fixture may be used on a track with a dimmer.
Consult dimmer manufacturer for correct dimmer selection.

Accessories

Accessory Holder: Integral
Accessories: Accepts two total
(1 lens + 1 louver or 2 lenses)
Lens: AF25, ADF25. Not compatible with AF25IR
Louver: AL25HC

Labels

UL, cUL

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:



AIMING ANGLE:





L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance. CBCP= Center Beam Candle Power.

LAMP

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (hrs.)
50W PAR20 SP	10°	4,600	2,500
50W PAR20 NFL	25°	1,500	2,500
50W PAR30 FL	35°	1,400	3,000
60W PAR16 NSP	10°	5,000	2,000
60W PAR16 NFL	30°	1,300	2,000
75W PAR30 NSP	10°	13,000	3,000
75W PAR30 NFL	25°	3,800	3,000
90W PAR38 NSP	9°	19,500	2,500
90W PAR38 SP	12°	14,500	2,500
90W PAR38 NFL	28°	4,500	2,500
90W PAR38 WFL	55°	2,250	2,500
120W PAR38 NSP	10°	25,000	3,000
120W PAR38 FL	30°	4,600	3,000
120W PAR38 WFL	55°	2,000	3,000
250W PAR38 SP	10°	46,500	4,500
250W PAR38 FL	30°	9,000	4,500



D	FC	L	W
6'	128	1.0'	1.0'
8'	72	1.4'	1.4'
10'	46	1.7'	1.7'
12'	32	2.1'	2.1'
4'	116	1.9'	1.9'
6'	51	2.9'	2.9'
8'	29	3.8'	3.8'
10'	19	4.8'	4.8'
6'	39	3.8'	3.8'
7'	29	4.4'	4.4'
8'	22	5.0'	5.0'
9'	17	5.7'	5.7'
6'	139	1.0'	1.0'
8'	78	1.4'	1.4'
10'	50	1.7'	1.7'
12'	35	2.1'	2.1'
3'	144	1.6'	1.6'
5'	52	2.7'	2.7'
7'	27	3.8'	3.8'
9'	16	4.8'	4.8'
8'	219	1.3'	1.3'
12'	97	1.9'	1.9'
16'	55	2.5'	2.5'
20'	35	3.1'	3.1'
6'	106	2.7'	2.7'
8'	59	3.5'	3.5'
10'	38	4.4'	4.4'
12'	26	5.3'	5.3'
10'	195	1.6'	1.6'
15'	87	2.4'	2.4'
20'	49	2.4'	2.4'
25'	31	3.9'	3.9'
8'	227	1.7'	1.7'
12'	101	2.5'	2.5'
16'	57	3.4'	3.4'
20'	36	4.2'	4.2'
6'	125	3.0'	3.0'
8'	70	4.0'	4.0'
10'	45	5.0'	5.0'
12'	31	6.0'	6.0'
6'	63	6.2'	6.2'
7'	46	7.3'	7.3'
8'	35	8.3'	8.3'
9'	28	9.4'	9.4'
10'	250	1.7'	1.7'
15'	111	2.6'	2.6'
20'	63	3.5'	3.5'
25'	40	4.4'	4.4'
6'	139	3.2'	3.2'
8'	78	4.3'	4.3'
10'	50	5.4'	5.4'
12'	35	6.4'	6.4'
4'	125	3.7'	3.7'
6'	56	5.6'	5.6'
8'	31	7.5'	7.5'
10'	20	9.3'	9.3'
12'	323	2.1'	2.1'
16'	182	2.8'	2.8'
20'	116	3.5'	3.5'
24'	81	4.2'	4.2'
8'	141	4.3'	4.3'
10'	90	5.4'	5.4'
12'	63	6.4'	6.4'
14'	46	7.5'	7.5'

D	C	FC	L	W
8'	4.6'	47	1.9'	1.6'
12'	6.9'	21	2.8'	2.4'
14'	8.1'	15	3.3'	2.8'
16'	9.2'	12	3.7'	3.2'
3'	1.7'	134	2.0'	1.7'
5'	2.9'	48	3.3'	2.8'
7'	4.0'	25	4.6'	3.9'
9'	5.2'	15	5.9'	5.0'
6'	3.5'	25	5.2'	4.4'
7'	4.0'	19	6.1'	5.1'
8'	4.6'	14	7.0'	5.8'
9'	5.2'	11	7.8'	6.6'
5'	2.9'	130	1.2'	1.0'
7'	4.0'	66	1.6'	1.4'
9'	5.2'	40	2.1'	1.8'
11'	6.4'	27	2.6'	2.2'
3'	1.7'	94	2.2'	1.9'
5'	2.9'	34	3.7'	3.1'
7'	4.0'	17	5.1'	4.3'
9'	5.2'	10	6.6'	5.6'
7'	4.0'	186	1.5'	1.3'
10'	5.8'	91	2.1'	1.8'
13'	7.5'	54	2.7'	2.4'
16'	9.2'	36	3.4'	2.9'
6'	3.5'	69	3.6'	3.1'
8'	4.6'	39	4.8'	4.1'
10'	5.8'	25	6.0'	5.1'
12'	6.9'	17	7.2'	6.1'
8'	4.6'	198	1.7'	1.5'
12'	6.9'	88	2.5'	2.2'
16'	9.2'	49	3.4'	2.9'
20'	11.5'	32	4.2'	3.6'
7'	4.0'	192	2.0'	1.7'
10'	5.8'	94	2.8'	2.4'
13'	7.5'	56	3.7'	3.2'
16'	9.2'	37	4.5'	3.9'
5'	2.9'	117	3.4'	2.9'
7'	4.0'	60	4.8'	4.0'
9'	5.2'	36	6.1'	5.2'
11'	6.4'	24	7.5'	6.3'
6'	3.5'	41	9.2'	7.2'
7'	4.0'	30	10.7'	8.4'
8'	4.6'	23	12.2'	9.6'
9'	5.2'	18	13.7'	10.8'
8'	4.6'	254	1.9'	1.6'
12'	6.9'	113	2.8'	2.4'
16'	9.2'	63	3.7'	3.2'
20'	11.5'	41	4.7'	4.0'
5'	2.9'	130	3.7'	3.1'
7'	4.0'	66	5.1'	4.3'
9'	5.2'	40	6.6'	5.6'
11'	6.4'	27	8.1'	6.8'
3'	1.7'	144	4.0'	3.2'
5'	2.9'	52	6.7'	5.4'
7'	4.0'	27	9.4'	7.5'
9'	5.2'	16	12.1'	9.7'
12'	6.9'	210	2.8'	2.4'
16'	9.2'	118	3.7'	3.2'
20'	11.5'	76	4.7'	4.0'
24'	13.9'	52	5.6'	4.8'
8'	4.6'	91	5.9'	5.0'
10'	5.8'	58	7.3'	6.2'
12'	6.9'	41	8.8'	7.4'
14'	8.1'	30	10.2'	8.7'

D	C	FC	L	W
2'	3.5'	144	1.4'	0.7'
3'	5.2'	64	2.1'	1.0'
4'	6.9'	36	2.9'	1.4'
5'	8.7'	23	3.6'	1.7'
1'	1.7'	231	2.3'	1.0'
2'	3.5'	58	4.6'	1.9'
3'	5.2'	26	7.0'	2.9'
4'	6.9'	14	9.3'	3.8'
2'	3.5'	44	7.2'	2.5'
3'	5.2'	19	10.8'	3.8'
4'	6.9'	11	14.4'	5.0'
5'	8.7'	7	18.0'	6.3'
2'	3.5'	156	1.4'	0.7'
3'	5.2'	69	2.1'	1.0'
4'	6.9'	39	2.9'	1.4'
5'	8.7'	25	3.6'	1.7'
1'	1.7'	163	2.7'	1.1'
2'	3.5'	41	5.5'	2.1'
3'	5.2'	18	8.2'	3.2'
4'	6.9'	10	10.9'	4.3'
3'	5.2'	194	1.9'	0.9'
4'	6.9'	109	2.6'	1.3'
5'	8.7'	70	3.2'	1.6'
6'	10.4'	49	3.6'	1.9'
2'	3.5'	119	4.2'	1.8'
3'	5.2'	53	6.2'	2.7'
4'	6.9'	30	8.3'	3.5'
5'	8.7'	19	10.4'	4.4'
4'	6.9'	152	2.6'	1.3'
6'	10.4'	60	3.8'	1.9'
8'	13.9'	38	5.1'	2.5'
10'	17.3'	24	6.4'	3.1'
3'	5.2'	201	2.6'	1.3'
4'	6.9'	113	3.5'	1.7'
5'	8.7'	73	4.3'	2.1'
6'	10.4'	50	5.2'	2.5'
2'	3.5'	141	4.9'	2.0'
3'	5.2'	63	7.4'	3.0'
4'	6.9'	35	9.8'	4.0'
5'	8.7'	23	12.3'	5.0'
2'	3.5'	70	44.5'	4.2'
3'	5.2'	31	66.8'	6.2'
4'	6.9'	18	89.1'	8.3'
5'	8.7'	11	111.3'	10.4'
4'	6.9'	195	2.9'	1.4'
6'	10.4'	87	4.3'	2.1'
8'	13.9'	49	5.7'	2.8'
10'	17.3'	31	7.2'	3.5'
2'	3.5'	156	5.5'	2.1'
3'	5.2'	69	6.2'	3.2'
4'	6.9'	39	10.9'	4.3'
5'	8.7'	25	13.7'	5.4'
1'	1.7'	250	10.7'	1.9'
4'	6.9'	63	21.5'	3.7'
3'	5.2'	28	32.2'	5.6'
4'	6.9'	16	42.9'	7.5'
6'	10.4'	161	4.3'	2.1'
8'	13.9'	91	5.7'	2.8'
10'	17.3'	58	7.2'	3.5'
12'	20.8'	40	8.6'	4.2'
3'	5.2'	125	8.2'	3.2'
4'	6.9'	70	10.9'	4.3'
5'	8.7'	45	13.7'	5.4'
6'	10.4'	31	16.4'	6.4'

D	C	FC	L	W
4'	4.0'	102	1.4'	1.0'
5'	5.0'	65	1.8'	1.2'
6'	6.0'	45	2.1'	1.5'
7'	7.0'	33	2.5'	1.7'
3'	3.0'	73	3.1'	2.0'
4'	4.0'	41	4.1'	2.7'
5'	5.0'	26	5.1'	3.4'
6'	6.0'	18	6.1'	4.1'
2'	2.0'	124	2.8'	1.8'
3'	3.0'	55	4.2'	2.7'
4'	4.0'	31	5.6'	3.6'
5'	5.0'	20	7.0'	4.5'
3'	3.0'	196	1.1'	0.7'
5'	5.0'	71	1.6'	1.2'
7'	7.0'	36	2.5'	1.7'
9'	9.0'	22	3.2'	2.2'
2'	2.0'	115	2.3'	1.5'
3'	3.0'	51	3.5'	2.3'
4'	4.0'	29	4.6'	3.0'
5'	5.0'	18	5.8'	3.8'
5'	5.0'	196	1.6'	1.1'
7'	7.0'	101	2.2'	1.6'
9'	9.0'	61	2.9'	2.0'
11'	11.0'	41	3.5'	2.4'
4'	4.0'	84	3.7'	2.5'
5'	5.0'	54	4.7'	3.1'
6'	6.0'	37	5.6'	3.8'
7'	7.0'	27	6.5'	4.4'
6'	6.0'	192	1.9'	1.3'
9'	9.0'	85	2.9'	2.0'
12'	12.0'	48	3.8'	2.7'
15'	15.0'	31	4.8'	3.3'
5'	5.0'	205	2.1'	1.5'
7'	7.0'	105	3.0'	2.1'
9'	9.0'	63	3.8'	2.7'
11'	11.0'	42	4.7'	3.3'
3'	3.0'	177	3.2'	2.1'
5'	5.0'	64	5.3'	3.5'
7'	7.0'	32	7.4'	4.9'
9'	9.0'	20	9.6'	6.3'
2'	2.0'	199	5.7'	2.9'
3'	3.0'	88	8.6'	4.4'
4'	4.0'	50	11.4'	5.9'
5'	5.0'	32	14.3'	7.4'
6'	6.0'	246	2.1'	1.5'
9'	9.0'	109	3.2'	2.2'
12'	12.0'	61	4.2'	3.0'
15'	15.0'	39	5.3'	3.7'
3'	3.0'	196	3.5'	2.3'
4'	4.0'	71	5.8'	3.8'
5'	5.0'	36	8.1'	5.3'
6'	6.0'	22	10.4'	6.8'
3'	3.0'	79	7.2'	4.0'
4'	4.0'	44	9.5'	5.3'
5'	5.0'	28	11.9'	6.6'
6'	6.0'	20	14.3'	7.9'
6'	6.0'	457	2.1'	1.5'
8'	8.0'	257	2.8'	2.0'
10'	10.0'	164	3.5'	2.5'
12'	12.0'	114	4.2'	3.0'
4'	4.0'	199	4.6'	3.0'
5	5.0'	127	5.8'	3.3'
6	6.0'	88	6.9'	4.0'
7	7.0'	65	8.1'	4.7'