IFS70

Step Light

Non IC Compact Fluorescent Outdoor Step Light

Catalog #:	Type:
Notes:	

Product Specifications

Description:

The IFS70 series is a compact fluorescent die-cast housing step light with three optional louvers for use in concrete or block wall construction. Provides safe illumination in a low profile recessed fixture. For outdoor applications. For wall mount only.

Features:

- Thermal protection integral to ballast
- Integral brackets for installation hardware
- NRTL listed for damp locations
- Heavy duty, low profile aesthetic louver trim included

Lamp:

(1) 9W TT 2PIN lamp (magnetic ballast only)

(1) 13\18\26W DTT 4PIN lamp (electronic ballast)

Louver Trim:

Trim constructed from heavy duty .040 steel. Choice of three louvers: Angled Grill, Flat Grill, and Etched Face

Housing:

Aluminum die-casting containing less than .3% copper to prevent corrosion applications. Two 1/2" knockouts provided for power feed. Captive black oxide stainless steel fastners, single piece molded silicone gasket, and an NRTL listed for wet locations.


Mounting:

For wall recessed mounting only. Front bracket plates allow for fixture to be secured to joists. Integral brackets provided for optional installation hardware. Insulation must be kept at least 3" away from all surfaces of lighting fixture.

Listing:

- NRTL wet location listed


Dimensions

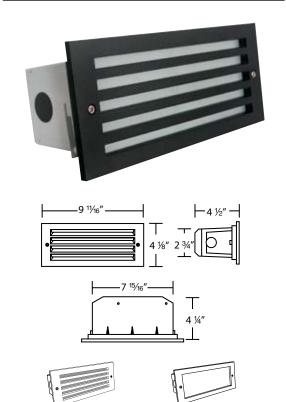

-AG: Angled Grill

-G: Flat Grill

Ordering Matrix





-ED: Etched Glass