

IFS80B

Step Light

Compact Fluorescent Die-Cast Outdoor Step Light

Catalog #:	Type:
Notes:	

Product Specifications

Description:

The IFS80B series is a compact fluorescent die-cast housing step light with three optional louvers for use in concrete or block wall construction. Provides safe illumination in a low profile recessed fixture. For outdoor applications. For wall mount only.

Features:

- Thermal protection integral to ballast
- Integral brackets for installation hardware
- Heavy duty, low profile aesthetic louver trim included

Lamp:

(1) 13\18W DTT 4 PIN lamp

Louwer Trim:

Trim constructed from heavy duty Die-Cast. Choice of three louvers: Angled Grill, Flat Grill, and Opal Face

Housing:

Aluminum die-casting containing less than .3% copper to prevent corrosion applications. Two 1/2" knockouts provided for power feed. Captive black oxide stainless steel fastners, single piece molded silicone gasket, and an socket for appropriate lamps. NRTL wet location listed




Mounting:

For wall recessed mounting only. Front bracket plates allow for fixture to be secured to joists. Integral brackets provided for optional installation hardware. Insulation must be kept at least 3" away from all surfaces of lighting fixture.


Listing:

- NRTL wet location listed


Dimensions

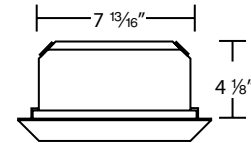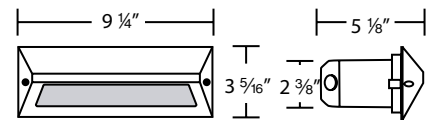

-AG: Angled Grill



-G: Flat Grill



-OP: Opal Grill W/ Lip

Ordering Matrix

IFS80B

Series	Lamp	Ballast	Voltage	Face Plate
	13 13W 4-pin DTT 18 18W 4-pin DTT	E electronic	Blank 120V -27 277V	-AG angled grill -G flat grill -OP opal face

*Note: Specifications and dimensions subject to change without notice.

