




Litelab Corp. | Jewelers' Collection  
251 Elm Street Buffalo, NY 14203 USA  
1-800-238-4120, fax 716-856-0156, www.litelab.com

job name: \_\_\_\_\_

fixture type: \_\_\_\_\_



## Machined Rings Collection

### Incandescent | 12-Volt

### Lamp-Ring | Yoke

### MR-16

#### Lamp



12-volt, Incandescent  
MR-16  
(by others)

#### Base Fixture Models

12-V.A.C.	LAMP TYPE	MAX. WATTAGE
J13MR16	MR-16	75-watt



#### Features

**Material(s):** 6000-series aluminum, precision-machined to blemish-free architectural finish.

**Lamp Ring:** machined to .187" seamless wall thickness; internally threaded to accept retaining ring for lamp and one or two accessories held level behind 70° beveled front.

**Socket Cup:** machined to .062" seamless wall thickness, securely fastened to ceramic socket; leads enclosed in basket-weave, stainless steel sleeve.

**Yoke:** extruded and folded .125" thickness; fastened to lamp ring by means of countersunk rivets, precision set to ensure non-drifting aiming angle.


**Input:** 12 VAC

**Temperature:** 40° C. (104° F.) ambient maximum

**Weight:** approx. 0.5 lb. with lamp and BusRun fitting.

#### Finishes

NT	Natural Aluminum
MB	Black
P	White
CP	Custom Paint

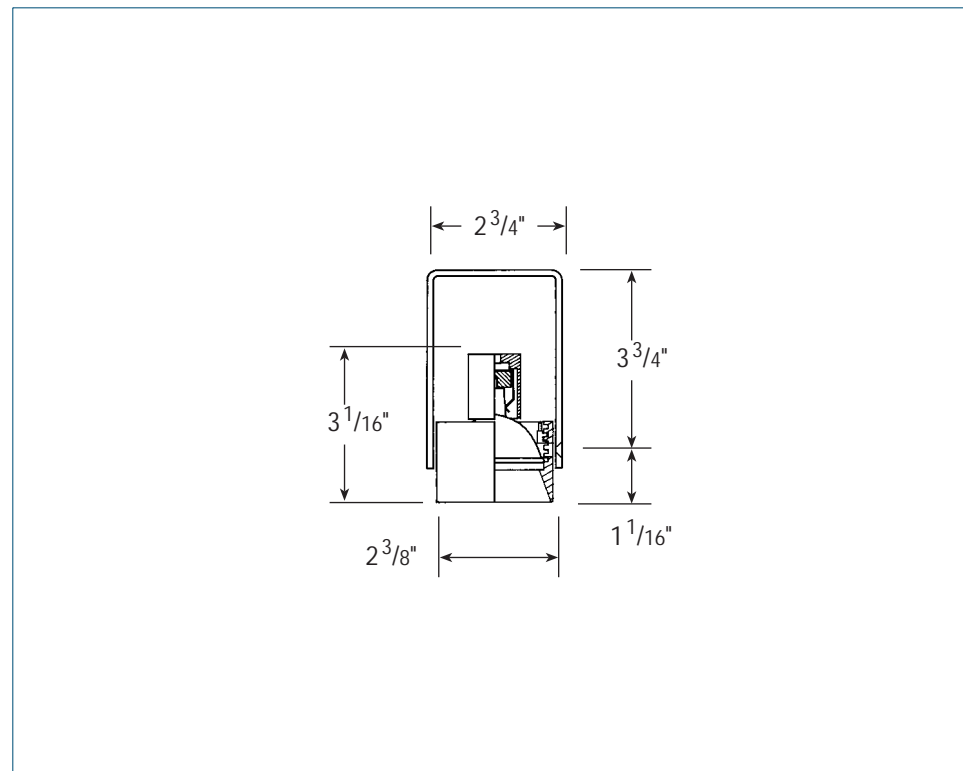


#### Specify:

DESCRIPTION:	BASE FIXTURE MODEL	FITTING	FINISH	ACCESSORIES (OPTIONAL)
example:	J13MR16	-9i	-NT	-OL-5X55-a


#### Accessories

GLASS FILTERS	LOUVERS & SCREENS	
OL-5X55-a 5" x 55" linear spread lens	LVH/a hex cell louver	SNOOT/a Tapered glare shield
OL-55X75-a-FR 55" x 75" frosted universal spread lens	B-15/a 15% light-blocking screen	SNOOT/a.5 Tapered wallwash adapter
OL-SOLITE-a Beam Softener		
OL-FLAT-a-UV Bausch & Lomb® Optivex™ UV filter		
consult for color glass		


#### Fittings




**BusRun® Busway**  
**9B** fused plug-in fitter for use with 12V BusRun busway



**BusRun® Busway**  
**9i** fused plug-in fitter with integral transformer for use with 120V BusRun busway



**Machined Canopy**  
**3E** machined canopy and 4" x 4" x 4" junction box with electronic low-voltage power supply.



**Machined Canopy**  
**3** machined canopy and mounting bracket for 4" octagon box by others and remote transformer (ordered separately).