



PT/PRT

JOB NAME

FIXTURE TYPE

PREMIUM RECESSED TROFFER

FEATURES

- Deep premium grade fixture available in 1x2, 1x4, 2x2, and 2x4 sizes in 1, 2, 3, 4, and 6 lamp configurations, in T5, T8, and BIAX.
- Flush steel precision mitered doorframe for PT series. Glare dampening ribbed regressed aluminum frame for PRT Series. Optional heavy gauge extruded aluminum frame available for high abuse areas.
- Doorframe hinges from either side and is secured by rotary cam latches. Optional locking screws for impact areas.
- Fully gasketed for light tight fit.
- For mounting in exposed T-Bar (grid) ceilings. Optional flanged construction for various other ceiling types.
- Suitable for through wiring.
- Available with energy efficient reflector in specular silver (95% reflectance).

SPECIFICATIONS

- **HOUSING**
Die formed heavy gauge steel unitized into one piece.
- **ELECTRICAL**
High efficiency electronic ballasts comply with Federal Energy Efficiency standards.
- **SHIELDING**
100% virgin acrylic prismatic is standard. Consult option sheet for other shielding.
- **FINISH**
All metal parts are phosphate coated and painted after fabrication with baked white enamel electrostatically applied providing a durable finish with a minimum 89% reflectance.
- **CERTIFICATION**
All units bear UL and Made in U.S.A. labels.



PREMIUM RECESSED TROFFER


Ordering Matrix

CATALOG NUMBER T8	LAMPS	LENGTH	WIDTH	CATALOG NUMBER T5	LAMPS
PT-1-217	2-FO17T8	23-3/4"	11-3/4"	PT-1-214	2-F14T5
PT-1-132	1-FO32T8	47-3/4"	11-3/4"	PT-1-128	1-F28T5
PT-1-232	2-FO32T8	47-3/4"	11-3/4"	PT-1-228	2-F28T5
PT-1-332	3-FO32T8	47-3/4"	11-3/4"	PT-1-328	3-F28T5
PT-2-417	4-FO17T8	23-3/4"	23-3/4"	PT-2-214	2-F14T5
PT-2-232U6	2-FBO32T8	23-3/4"	23-3/4"	PT-2-314	3-F14T5
PT-2-331U	3-FBO31T8	23-3/4"	23-3/4"	PT-2-414	4-F14T5
PT-2-232	2-FO32T8	47-3/4"	23-3/4"	PT-2-228	2-F28T5
PT-2-332	3-FO32T8	47-3/4"	23-3/4"	PT-2-328	3-F28T5
PT-2-432	4-FO32T8	47-3/4"	23-3/4"	PT-2-428	4-F28T5
PT-2-632	6-FO32T8	23-3/4"	23-3/4"	PT-2-2BX40	2-F40BX
		23-3/4"	23-3/4"	PT-2-2BX40	2-F40BX

LENGTH	WIDTH	CATALOG NUMBER T5HO	LAMPS
23-3/4"	11-3/4"	PT-1-224	2-F24T5HO
47-3/4"	11-3/4"	PT-1-154	1-F54T5HO
47-3/4"	11-3/4"	PT-1-254	2-F54T5HO
47-3/4"	11-3/4"	PT-1-354	3-F54T5HO
23-3/4"	23-3/4"	PT-2-214	2-F14T5HO
23-3/4"	23-3/4"	PT-2-314	3-F14T5HO
23-3/4"	23-3/4"	PT-2-414	4-F14T5HO
23-3/4"	23-3/4"	PT-2-224	2-F24T5HO
23-3/4"	23-3/4"	PT-2-324	3-F24T5HO
23-3/4"	23-3/4"	PT-2-424	4-F24T5HO

Options:

- Regressed Aluminum Door – change prefix PT to PRT
- Specular Silver Reflector – suffix SS95
- Electronic Dimming Ballast – suffix-DIM
- Flanged for drywall installation – add M to prefix (MPRT/MPT)
- Sport – suffix 125/250 –TP – 20GA
- Extruded aluminum door frame – suffix EAF

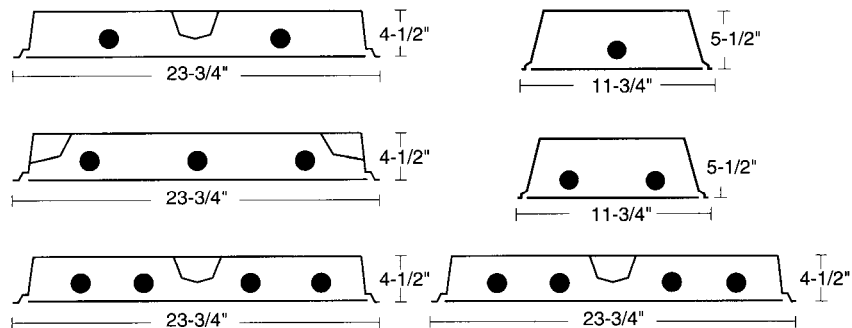

*For critical application verify all dimensions with factory.
 For additional Lamp/Ballast options, consult factory.*