



# Architectural Landscape Floods

## ORDERING INFORMATION

**6700**

Up to 150W Incandescent, 250W Tungsten-Halogen

<b>6700</b>	Gray finish
<b>6700P</b>	Bronze finish
<b>6700B</b>	Black finish
<b>6700G</b>	Green finish
<b>6700W</b>	White finish
<b>6700S</b>	Simulated Satin
<b>6700N</b>	Natural finish (indoor use only)





6700 SERIES  
with 6941 mounting plate


**6800**

Up to 300W Incandescent, 250W Tungsten-Halogen

<b>6800</b>	Gray finish
<b>6800P</b>	Bronze finish
<b>6800B</b>	Black finish
<b>6800G</b>	Green finish
<b>6800W</b>	White finish
<b>6800S</b>	Simulated Satin
<b>6800N</b>	Natural finish (indoor use only)



6700 SERIES  
with 6941 mounting plate

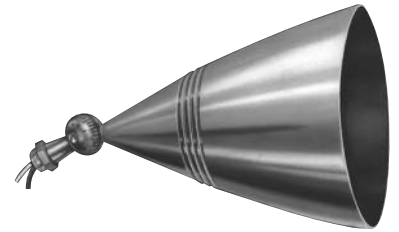

## PRODUCT SPECIFICATIONS

- Architectural Bullets are designed for safety, security, and accent lighting. Areas requiring good color rendition, instant-on, dimming capability, easy installation and low initial cost.
- Precision die-cast aluminum housing with ribbed design for maximum heat dissipation.
- Socket mounts to integral heat sink pod for effective heat transfer.
- Premium porcelain socket with plated medium base screw shell and reinforced center contact for positive fit.
- Quad gasketing system consists of a thick silicone rubber seal sandwiched between a heat barrier and plated locking ring.
- 1/2" NPT threaded adjustable arm, locknut preinstalled, prelubed to facilitate mounting.
- Cast-in quadrants with serrated teeth lock unit in place once aimed.
- Extra long pigtails for easy splicing.
- 6700 Units equipped with weep holes for open and above horizontal applications.
- 6800 units must be aimed below horizontal.

## TECHNICAL INFORMATION

Architectural Bullet Series are not supplied with lamp. 6700 Series accepts 150W Incandescent, QPAR38 Tungsten-Halogen. 6800 Series accepts 300W PAR28/R40 Incandescent, 250W QPAR38 Tungsten-Halogen. Beam spread controlled by lamp type.

See page 6-A for Lamp Data.



UL Wet Location Listed.  
UL File Number: E57163

**ACCESSORIES****671S****672S****673B****BASIC CANOPY PLATES**

	Catalog No.	Finish	Catalog No.	Finish
<b>ONE HOLE</b>	<b>671</b>	Gray	<b>671S</b>	Satin Aluminum
	<b>671B</b>	Black	<b>671P</b>	Bronze
	<b>671W</b>	White		
<b>TWO HOLE</b>	<b>672</b>	Gray	<b>672S</b>	Satin Aluminum
	<b>672B</b>	Black	<b>672P</b>	Bronze
	<b>672W</b>	White		
<b>THREE HOLE</b>	<b>673B</b>	Black	<b>673W</b>	White

**Product Specifications**

5-13/16" sq. x 7/8" deep. Die-cast aluminum. Fits all recessed FS, gem, 3" or 4" outlet boxes or matching Stonco 5-3/16" sq. surface box. All holes tapped 1/2" NPS. Screws included.

**ADAPTER PLATE**


**VCP**-Aligns canopy plate for flush mounting over recessed boxes.

**SURFACE MOUNTING BOX**

Catalog No.	Description
<b>6941B</b>	5-3/16" sq. x 1-1/2" deep

**Product Specifications**

Matte black epoxy finish. Die-cast aluminum. Holds Stonco 5-3/16" sq. canopy plates on any flat surface. Four side, one back hole tapped 1/2" NPS for surface or thru-wall conduit. Four plugs, two mounting screws.

**WIRE GUARD - Protects Lamps**

Catalog No.	Description
<b>6850</b>	Stainless steel

**Product Specifications**

Stainless steel wire guard fits all 6700 & 6800 series bullets.

**PAR38 SNAP-ON LENSES - Prevents Thermal Shock**

Catalog No.	Description	Catalog No.	Description
<b>48A</b>	Amber	<b>48G</b>	Green
<b>48B</b>	Blue	<b>48R</b>	Red
<b>48C</b>	Clear	<b>47</b>	Snap-on lens holder

**Product Specifications**

4-3/4" dia. heat resistant lenses mount directly on all PAR38 lamps when used with No. 47 snap-on lens holder. Also clip inside 6755 Louver.

**SNAP-ON LENS HOLDER: 47** order lenses separately