



**VISTA  
PROFESSIONAL  
OUTDOOR  
LIGHTING**

Type: \_\_\_\_\_

Model: \_\_\_\_\_

Project: \_\_\_\_\_

## SPECIFICATION SHEET

### MODEL: 1423 - 120-Volt Series: Bollards and Beacons

#### SPECIFICATIONS:

**LAMP TYPE:**

PL- Compact Fluorescent. 22W Maximum. Ballast is integrated into fixture. Please specify ballast type from the fixture ordering information chart. Lamp not included with fixture, order separately.

**HOUSING:**

Die-cast, copper-free aluminum.

**POST:**

5" diameter, heavy gauge, extruded aluminum (1/8" wall thickness).

**FINISH:**

Polyester powder-coated finish available in Black, Verde, Architectural Brick, Architectural Bronze, Granite, Pewter, Terracotta, Rust, Hunter Green, Mocha, Weathered Bronze, Weathered Iron, and White.

**SOCKET/LAMP HOLDER:**

Compact fluorescent thermoplastic socket.

**BALLAST:**

High-power factor magnetic ballast rated for  $\pm 32^{\circ}\text{F}$  starting, 120-volt standard.

**LENS:**

Clear, frosted or prismatic threaded and gasketed, tempered glass vapor globe.

**MOUNTING:**

Aluminum mounting base and foundation anchor rods included.

**FASTENERS:**

All fasteners are stainless steel.

**WIRING:**


Prewired with 200°C-rated wire along with a grounded lead.

**CERTIFICATION:**

UL Listed to U.S. and Canadian safety standards for line voltage landscape luminaires (UL 1598). The maximum wattages allowed by Underwriters Laboratories (UL) for the U.S. and Canadian markets may vary. Maximum wattages specified are Underwriters Laboratories U.S. standard. Please contact Vista for any questions about the maximum wattages allowed by UL Canadian standards.

All Vista luminaires are **MADE IN THE U.S.A.**

#### DIMENSIONS:

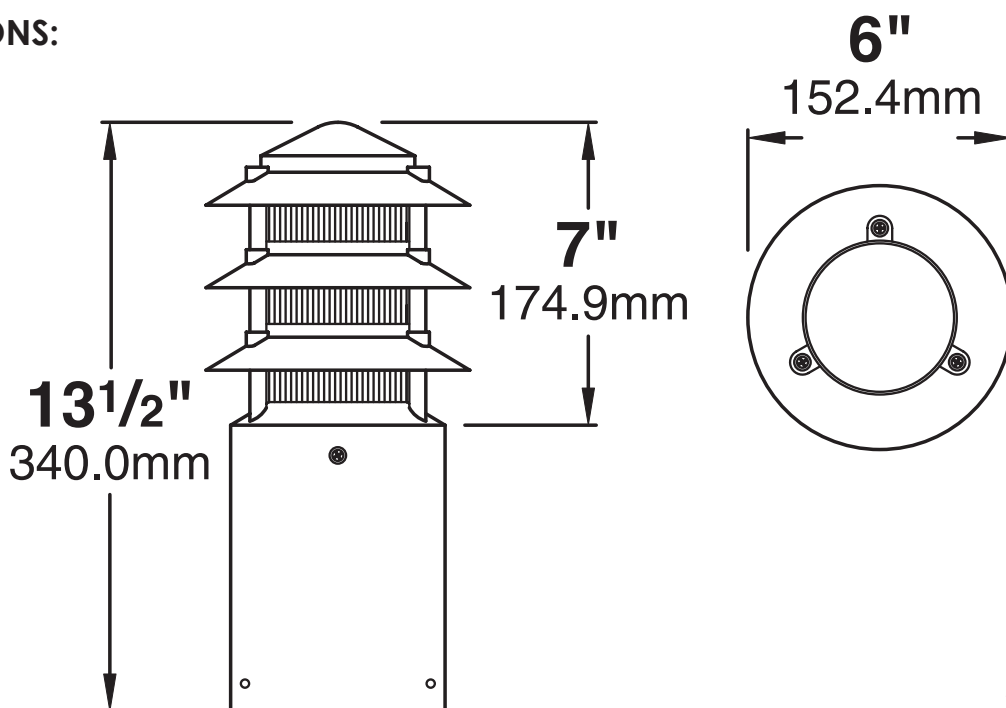

In an effort to improve product design U.S.T.E., Inc. reserves the right to modify the specifications of this fixture.

1625 Surveyor Avenue • Simi Valley, CA 93063 • (805) 527-0987 • (800) 766-VISTA (8478)

FAX: (888) 670-VISTA (8478) • email@vistapro.com • www.vistapro.com



**FIXTURE ORDERING INFORMATION**

**TO ORDER FIXTURE:** Select appropriate choice from each column as in the following example

**EXAMPLE:** 1423-B-CR-13-120

CATALOG NO.	FINISH	LENS	INTEGRATED FLUORESCENT BALLAST	
			WATTAGE	VOLTAGE
<b>1423</b>	<b>B-</b> Black	<b>CR-</b> Clear lens	<b>5</b>	<b>120</b>
	<b>G-</b> Verde	<b>FR-</b> Frosted lens	<b>7</b>	<b>208</b>
	<b>BR-</b> Architectural Brick	<b>PR-</b> Prismatic lens	<b>9</b>	<b>240</b>
	<b>Z-</b> Architectural Bronze		<b>13*</b>	<b>277</b>
	<b>GT-</b> Granite		<b>22*</b>	<b>MT-</b> Multi-tap
	<b>P-</b> Pewter			
	<b>TC-</b> Terracotta			
	<b>R-</b> Rust			
	<b>HG-</b> Hunter Green			
	<b>M-</b> Mocha			
<b>WB-</b> Weathered Bronze				
<b>WI-</b> Weathered Iron				
<b>W-</b> White				

Lamp not included with fixture, order separately. - For available lamps, see Lamp Guide, Vista catalog.

\*13 or 22-watt ballast available in 120 or 277 volts only.